



Konformitätserklärung

Hiermit erklärt SOLA-Messwerkzeuge GmbH & Co KG, dass der Funkanlagentyp

- | | |
|--------------------------------------------|---------------------------------|
| <input type="checkbox"/> RED DIGITAL | <input type="checkbox"/> 25 cm |
| <input type="checkbox"/> REDM DIGITAL | <input type="checkbox"/> 30 cm |
| <input type="checkbox"/> RED LASER DIGITAL | <input type="checkbox"/> 60 cm |
| | <input type="checkbox"/> 80 cm |
| | <input type="checkbox"/> 120 cm |
| | <input type="checkbox"/> 180 cm |

der Richtlinie 2014/53/EU entspricht.

Der vollständige Text der EU-Konformitätserklärung und Informationen zur bestimmungsgemäßen Verwendung finden Sie zum jeweiligen Produkt hier:

www.sola.at

SOLA-Messwerkzeuge GmbH & Co KG
Unteres Tobel 25, 6840 Götzis, Austria
T +43 5523 53380-0, sola@sola.at
www.sola.at

Calibration

MODE 1 x → mm/m

MODE 2 x → %

MODE 3 x → in/ft (decimal)

MODE 4 x → in/ft (fractional)

Calibration

HOLD 100 MS 2 sec → INC

HOLD 100 MS 2 sec → ABS

Calibration

For calibration place RED DIGITAL with measuring surface on a horizontal plane. Switch on the module with the ON button.

Power + MODE 1 x → Wait until -1- appears on screen.

Calibration pos. 1

Power 1 x → Wait until -2- appears on screen.


Turn RED DIGITAL 180 degrees.

Calibration pos. 2

Power 1 x → Wait until measurement appears on screen. Done.

Quick Start

RED/REDM DIGITAL

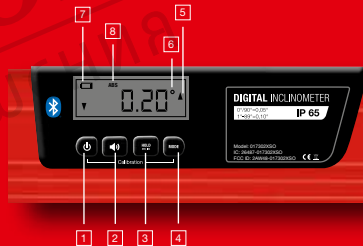

- 1 ON/OFF switch | Display light
- 2 On/off switch acoustics (signal at 0° and 90°)
- 3 HOLD function (measurement is retained by pressing once) | Switch between ABS (absolute) and INC (incremental)
- 4 MODE button for switching between measured value settings (°, mm/m, %, in/ft)
- 5 Arrows show in which direction the spirit level has to be moved
- 6 Display °, mm/m, %, in/ft
- 7 Display in the case of low battery voltage
- 8 Display of ABS or INC

Calibration

Power icon → 1 sec → ON

Power icon → 2 sec → OFF

Calibration

Speaker icon → 1 x → Speaker icon → 0°; 90°

Speaker icon → 1 x → Speaker icon with slash

Calibration

Power icon → 1 x → Lightbulb icon

Power icon → 1 x → Lightbulb icon with slash

Calibration

HOLD (on PC) icon → 1 x → Barcode icon

HOLD (on PC) icon → 1 x → Barcode icon with slash

SOLA-Messwerkzeuge
GmbH & Co KG
Unteres Tobel 25
6840 Götzis, Austria
T +43 5523 53380-0
sola@sola.at, www.sola.at



Operating instructions on www.sola.at

Download free SOLA Measures app to connect the RED DIGITAL to your smartphone via Bluetooth.



SOLA Measures



Download on the App Store



GET IT ON Google Play



FAQ & Support



Declaration of Conformity

Herewith declares SOLA-Messwerkzeuge GmbH & Co KG that the radio equipment type

- | | |
|--------------------------------------------|---------------------------------|
| <input type="checkbox"/> RED DIGITAL | <input type="checkbox"/> 25 cm |
| <input type="checkbox"/> REDM DIGITAL | <input type="checkbox"/> 30 cm |
| <input type="checkbox"/> RED LASER DIGITAL | <input type="checkbox"/> 60 cm |
| | <input type="checkbox"/> 80 cm |
| | <input type="checkbox"/> 120 cm |
| | <input type="checkbox"/> 180 cm |

complies with Directive 2014/53/EU.

The full text of the EU Declaration of Conformity and information on the intended use of the product can be found here:

www.sola.at

SOLA-Messwerkzeuge GmbH & Co KG
Unteres Tobel 25, 6840 Götzis, Austria
T +43 5523 53380-0, sola@sola.at
www.sola.at