


InspectorCamera 3D (6 mm, 2 m)

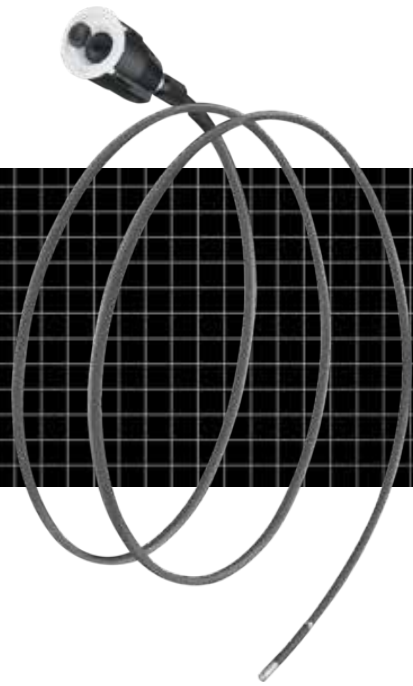

Steerable camera unit for VideoInspector 3D with 2 metre long probe and individually flexible camera head – great flexibility for tricky jobs and perfect for small openings


This steerable camera unit with VideoInspector 3D with 2 metre long probe provides great flexibility for tricky jobs and is perfect for small openings. Using 3D control, the waterproof titanium camera head with a maximum mobility of 160° can be quickly adjusted to the ideal perspective. This allows hard-to-reach places to be investigated which cannot be viewed with fixed camera systems. Object lighting with six high-performance ceramic LEDs ensures images are clear, even in the most demanding conditions.

TECHNICAL DATA

Diameter Camera Head	6 mm
Camera Resolution	960 x 720 pixels
Field of View (FOV)	85°
Depth of Focus (DOF)	2.5 ... 10 cm
Length of Probe	2 m
Dimensions (W x H x D)	45 mm x 2150 mm x 45 mm x #
Weight	240 g #



- Steerable camera unit for VideoInspector 3D
- This 2 m long camera unit is the perfect solution for leak detection applications
- Small camera head, ideal for places that are hard to reach
- Manual 3D control of titanium camera head which moves through max. 160°
- Sturdy, durable adjustment mechanism
- Powerful object lighting thanks to 6 high-performance ceramic LEDs
- High-grade, long-life flexible tungsten tubing

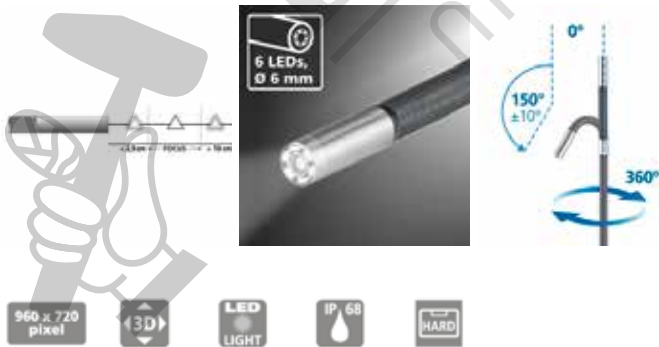

SCOPE OF DELIVERY



Item No. 082.276A GTIN (EAN) 4021563732494 SU 2