


Hollow core M16


710 711



Execution

- ▶ With internal M 16 thread
- ▶ 5 carbide cutters for 25 mm Ø
- ▶ 6 carbide cutters for 30 - 80 mm diameter
- ▶ 8 carbide cutters from 90 mm diameter
- ▶ Burnished and hardened
- ▶ Made of chrome-nickel-molybdenum steel with extra thick wall from 65 mm Ø without cross-bore


For use in

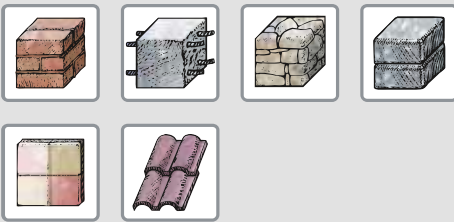

Application

- ▶ Locating shank M16 hexagon □69
- ▶ Locating shank M16 for SDS-plus □70
- ▶ Centre drill bit for locating shank M16 □70
- ▶ Locating shank M16 SDS-plus TURBOKEIL complete □71

Packaging



□166

D Ø mm	D Ø "	L2 mm	L1 mm		EAN 4016707...		€
25,0	1	60	80	1	160011	710 000 025	26,72
30,0	1 3/16	60	80	1	160028	710 000 030	26,72
35,0	1 1/8	60	80	1	160042	710 000 035	28,17
40,0	1 1/16	70	90	1	160059	710 000 040	28,17
45,0	1 1/4	70	90	1	160066	710 000 045	29,98
50,0	1 3/32	70	90	1	160073	710 000 050	29,98
55,0	2 3/16	52	72	1	160271	711 000 055	29,98
60,0	2 3/8	52	72	1	160158	711 000 060	30,25
65,0	2 9/16	52	72	1	160103	711 000 065	30,25
68,0	2 11/16	52	72	1	160134	711 000 068	36,93
80,0	3 5/32	60	80	1	160110	711 000 080	42,78
90,0	3 17/32	60	80	1	160127	711 000 090	49,47
100,0	3 15/16	60	80	1	160196	711 000 100	80,54