


Laserliner®

AC-tiveTester




Universal voltage tester for the entire electrical system of buildings

Rev. 0412

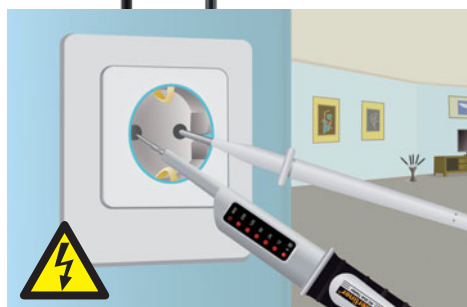

- **Reliable and fast voltage tester** with the most commonly used nominal voltages
- **Automatic AC voltage and DC voltage test**
- **Automatic range and function changeover** for direct testing and measurement
- **CAT III - 600V** – can be used for measurements throughout building installations
- **Operates without batteries**
- **Rugged, practical enclosure** in space-saving mini format

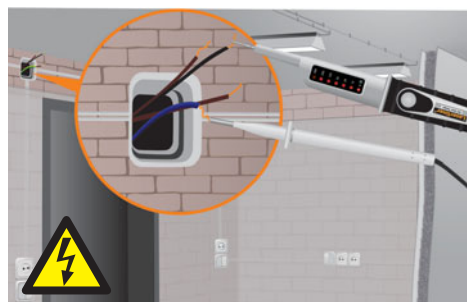

High contrast LED indicator

TECHNICAL DATA

VOLTAGE RANGES

6, 12, 24, 50, 120, 230, 400 V AC
+/-6, 12, 24, 50, 120, 230, 400 V DC

FREQUENCY RANGE 50/60HZ

LED INDICATOR

6, 12, 24, 50, 120, 230, 400 V
Polarity plus/minus

TOLERANCE

-30% to 0% of reading

RESPONSE TIME < 0.1 s, LED

OVERVOLTAGE CATEGORY

CAT III - 600V, pollution degree 2

TYPE OF PROTECTION IP 64

POWER CONSUMPTION

max. 30 mA
(cycle: 5% switch-on duration / 10 min.)

OPERATING TEMPERATURE

-10 °C...55 °C

WEIGHT 115 g



AC-tiveTester
+ protective covers

Packing dimension (W x H x D)
190 x 310 x 55 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
AC-tiveTester	083.020A	4 021563 671151	5

CAT III
600V

IP 64