

Conical scoring blades *industrial line*





288

APPLICATION: for chip-free scoring on plastic-laminated panels.

MACHINES: horizontal and vertical sizing machines equipped with scoring device for vertical adjustment.

MATERIAL: single or double-sided plastic-laminated panels, MDF.

ISO:	KCR05
HV10:	2.150
N/mm ² :	2.500

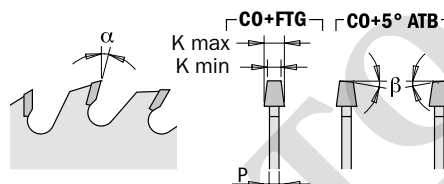

D mm	B mm	Pin Hole 	Z	K mm	P mm	α	β	ORDER NO.
80	20		12	3,1-4,0	2,2	10°	CO+FTG	S288.080.12H
100	20		20	3,1-4,0	2,5	5°	CO+5° ATB	288.100.20H
100	22		20	3,1-4,0	2,5	5°	CO+5° ATB	288.100.20K
120	20		24	3,1-4,0	2,5	5°	CO+5° ATB	288.120.24H
120	20		24	3,4-4,2	2,5	5°	CO+5° ATB	288.120.24H1
120	22		24	3,1-4,0	2,5	5°	CO+5° ATB	288.120.24K
125	20		24	3,1-4,0	2,5	5°	CO+5° ATB	288.125.24H
125	20		24	3,4-4,2	2,5	5°	CO+5° ATB	288.125.24H1
125	20		24	4,3-5,5	3,2	10°	CO+FTG	288.125.24H2
125	22		24	3,1-4,0	2,5	5°	CO+5° ATB	288.125.24K
125	45		24	4,3-5,5	3,2	10°	CO+FTG	288.125.24Q
140	16	1/6/33	24	3,1-4,0	2,2	10°	CO+FTG	Y288.140.24E
150	45		36	4,3-5,5	3,2	10°	CO+FTG	288.150.36Q
160	45	3/11/70	36	4,3-5,5	3,2	10°	CO+FTG	288.160.36Q
160	55	3/7/66	36	4,3-5,5	3,2	10°	CO+FTG	288.160.36Q
160	55	3/7/66 + 3/6/84	36	4,7-6,0	3,5	10°	CO+FTG	Y288.160.36Q2
180	20		36	4,3-5,5	3,2	10°	CO+FTG	Y288.180.36H
180	30		36	4,3-5,5	3,2	10°	CO+FTG	288.180.36M
180	45		36	4,7-6,0	3,5	10°	CO+FTG	288.180.36Q
180	55		36	5,0-6,2	3,5	10°	CO+FTG	288.180.36Q
180	50	3/12,5/80	44	4,3-5,5	3,2	10°	CO+FTG	288.180.44T
200	20		36	4,3-5,5	3,2	10°	CO+FTG	288.200.36H
200	45		36	4,7-6,0	3,5	10°	CO+FTG	288.200.36Q
200	45		36	4,3-5,5	3,2	10°	CO+FTG	Y288.200.36Q2
200	65	2/9/100 + 2/9/110	36	4,3-5,5	3,2	10°	CO+FTG	288.200.36J
215	50	3/15/80	42	4,3-5,5	3,2	10°	CO+FTG	288.215.42T
300	50	3/15/80	48	4,3-5,5	3,2	10°	CO+FTG	288.300.48T
300	65	2/9/100 + 2/9/110	72	4,3-5,5	3,2	10°	CO+FTG	288.300.72J

