



LaserRange-Master i3





Laser distance meter –
Simple operating techniques

Rev.0116



- **Point-precise measuring with laser** to determine lengths exactly
- **The area and volume functions** permit the acquisition of room sizes, for example to calculate material quantities
- **Measuring accuracy** up to 30 m: $\pm 2 \text{ mm}^*$
- **Inside measurement range: 0,3 m to 30 m**
- **2 selectable measurement reference points:** front and rear
- **Min/Max function** to determine diagonals, verticals and horizontals
- **Illuminated 2-line VTN display**
- **Small, compact design** – fits in any toolbox
- **Sturdy, ergonomically designed, rubberised casing**

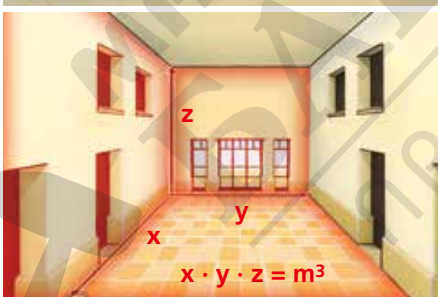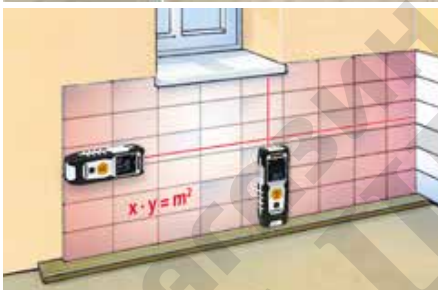

TECHNICAL DATA

ACCURACY $\pm 2 \text{ mm}$ (typical)*
MEASUREMENT RANGE max. 30 m
MINIMAL RANGE 0,3 m
LASER Class 2 < 1mW
LASER WAVELENGTH 635 nm
OPERATING TEMPERATURE -10°C ... 40°C
STORAGE TEMPERATURE -20°C ... 70°C
UNIT m
AUTOMATIC SWITCH-OFF 30 sec laser / 3 min device
FUNCTIONS distances, areas, volumes, min/max/duration measurement
POWER SUPPLY Batteries 2 x 1,5 V type AAA
DIMENSIONS (W x H x D) 40 x 110 x 24 mm
WEIGHT with batteries 90 g

* See operating instructions for specific accuracies



Illuminated VTN display



Small, compact design



Protective rubber casing



LaserRange-Master i3
inclusive softbag
+ batteries (2 x 1,5 V type AAA)
Packaging dimension (W x H x D)
–

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master i3	080.830A	4 021563 694204	5

