



Laserliner®

LaserRange-Master T3



Laser distance meter –
with angle function

Rev.0317

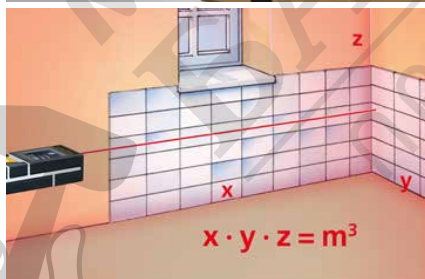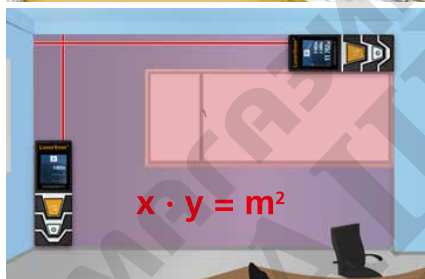

- Point-precise measuring with laser to determine lengths exactly
- The **area and volume functions** permit the acquisition of room sizes, for example to calculate material quantities
- **360° inclination sensor** for determining the horizontal and vertical distance
- **High measuring accuracy** up to 30 m: $\pm 2 \text{ mm}^*$
- **Inside measurement range: 0.2 m to 30 m**
- **3 selectable measurement reference points:** front, tripod and rear
- **Continuous measuring function**
- Illuminated 3-line **colour LCD** with touch function
- Stable, ergonomic housing

TECHNICAL DATA

ACCURACY $\pm 2 \text{ mm}$ (typical)*
MEASUREMENT RANGE max. 30 m
MINIMAL RANGE 0,2 m
LASER Class 2 < 1mW
LASER WAVELENGTH 650 nm
OPERATING TEMPERATURE 0°C ... 40°C
STORAGE TEMPERATURE -20°C ... 70°C
UNIT (selectable) m / ft / inch / ' _ ' "
AUTOMATIC SWITCH-OFF dynamic depending on measuring mode: Laser: 30 s - 5 min Device: 3 min - 8 min
FUNCTIONS distances, areas, volumes, continuous measurement, Pythagoras 1 + 2, angle function 1 + 2
POWER SUPPLY Batteries 2 x 1.5 V type AAA
DIMENSIONS (W x H x D) 100 x 23 x 35 mm
WEIGHT with batteries 82 g

* See operating instructions for specific accuracies



Illuminated colour LCD



Multi purpose functions



Touch screen for
switching functions



LaserRange-Master T3

inclusive softbag
+ batteries (2 x 1.5 V type AAA)

Packaging dimension (W x H x D)
113 x 236 x 64 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master T3	080.840A	4 021563 698141	5