


Laserliner

CompactCross-Laser Plus




Automatic cross-line laser with Bluetooth interface

Rev18W49

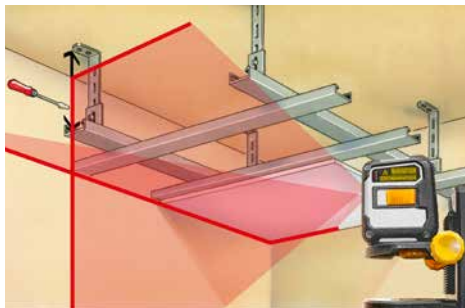

- With 2 clearly visible laser lines and additional slope function
- Bluetooth interface
- Individually switchable laser lines
- Height-adjustable bracket with 1/4" and 5/8" tripod threads and magnets

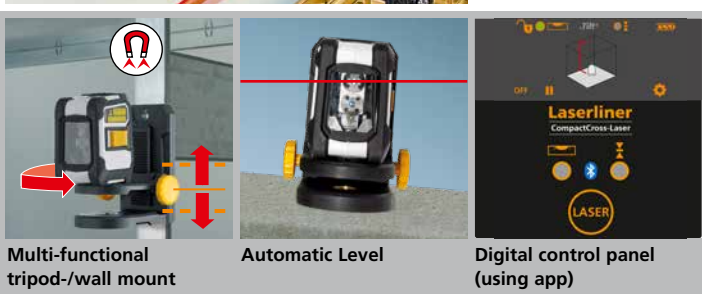


Multi-functional tripod-/wall mount

Automatic Level

Digital control panel (using app)

TECHNICAL DATA	
SELF-LEVELLING RANGE	$\pm 4^\circ$
ACCURACY	$\pm 0,35 \text{ mm / m}$
OPERATING RANGE	15 m (depending on room illumination)
OPERATING RANGE WITH HAND RECEIVER	30 m (depends on how the technology affects the difference in brightness)
LASER WAVELENGTH	635 nm
LASER CLASS	2 / < 1 mW
POWER SUPPLY	2 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME	14 hours (alkaline batteries)
OPERATING CONDITIONS	-10°C ... 50°C, Max. humidity 80% rH, no condensation, Max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-10°C ... 70°C, MAX. HUMIDITY 80% RH
RADIO MODULE OPERATING DATA	Bluetooth LE 4.x interface; Frequency band: ISM band 2400-2483.5 MHz, 40 channels; Transmission power: max. 10 mW; Bandwidth: 2 MHz; Bit rate: 1 Mbit/s; Modulation: GFSK/FHSS
DIMENSIONS (W x H x D)	75 x 88 x 58 mm
WEIGHT (incl. batteries)	246 g



CompactCross-Laser Plus

+ tripod-/wall mount
+ batteries (2 x type AA)

Packing dimension (W x H x D)
190 x 315 x 200 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
CompactCross-Laser Plus	081.142A	4 021563 704972	5

