


Laserliner

DigiLevel Laser G40



Rev18W44

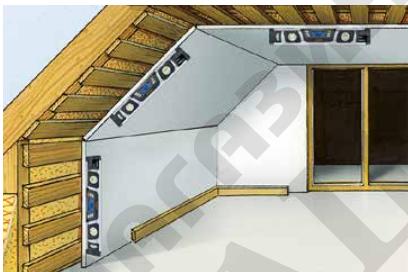

Integrated laser line



Illuminated display



Magnetic



AutoSound at
0°/45° / 90°/135°/180°

TECHNICAL DATA

PRECISION electronic measuring

- ± 0,1° at 0° ... 1°
- ± 0,1° at 89° ... 90°
- ± 0,2° at 1° ... 89°

DISPLAY ACCURACY 1 decimal place

VIAL ± 0,5 mm/m

LASER CLASS 2 < 1mW

LASER WAVELENGTH 515 nm

OPERATING CONDITIONS 0°C ... 40°C, max. humidity 80% rH, no condensation, max. working altitude 2000 m above sea level

STORAGE CONDITIONS -10°C ... 60°C, max. humidity 80% rH

POWER SUPPLY 2 x 1.5V (type AAA/LR03)

DIMENSIONS (W x H x D) 400 x 66 x 30 mm

WEIGHT (incl. batteries) 566 g

* Approx. 6 times brighter than a typical red laser with 630 - 660 nm



DigiLevel Laser G40
 inclusive softbag
 + Batteries

Packing dimension (W x H x D)
 90 x 460 x 55 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
DigiLevel Laser G40	081.255A	4 021563 704064	5

