

## Laserliner

# MasterLevel Compact Plus



Digital electronic spirit level  
in compact format –  
with Bluetooth interface

Rev1 8W08




- **Reference function** for transferring angles
- **Bluetooth interface** for measurement data transfer
- **FlipDisplay:** the display automatically turns when overhead measurements are involved. So the illuminated display is well readable under all conditions
- **Calibration function** to recalibrate the sensor and increase the measuring accuracy
- **Hold function** to retain the current measured value on the display
- **Optimal use by AutoSound:**  
The horizontal, vertical and 45° position is displayed together with an acoustic signal  
– helpful when aligning objects.
- **V-groove,** for holding on pipes
- 360° Angle display
- Illuminated display
- Strong magnets
- Compact format



### TECHNICAL DATA

<b>MEASUREMENT PRECISION</b> electronic slope ± 0,05° at 0° and 90° ± 0,1° at 1° ... 89°
<b>DISPLAY ACCURACY</b> 2 decimal places
<b>OPERATING CONDITIONS</b> 0 ... 50°C, 85%rH, no condensation, max. altitude 2000 m
<b>STORAGE CONDITIONS</b> -20 ... 70°C, 85%rH, no condensation
<b>RADIO MODULE OPERATING DATA</b> Bluetooth LE 4.x interface; Frequency band: ISM band 2400–2483.5 MHz, 40 channels; Transmission power: max. 10 mW; Bandwidth: 2 MHz; Bit rate: 1 Mbit/s; Modulation: GFSK/FHSS
<b>POWER SUPPLY</b> 2 x 1,5V (Typ AAA/LR03)
<b>WEIGHT</b> with battery 290 g
<b>DIMENSIONS</b> (W x H x D) 152 x 60 x 30 mm

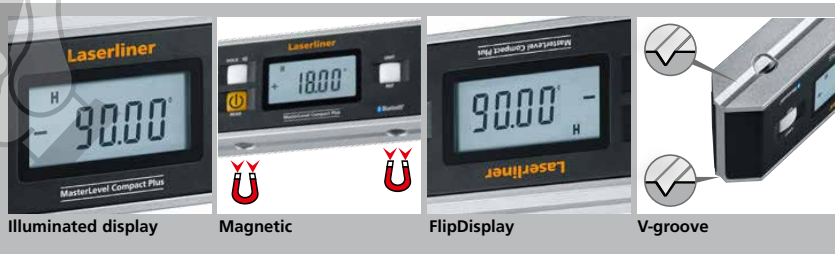

Illuminated display

Magnetic

FlipDisplay

V-groove



**MasterLevel Compact Plus**  
inclusive carrying case  
+ batteries

**Packing dimension** (W x H x D)  
155 x 265 x 81 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterLevel Compact Plus	081.265A	4 021563 702626	1

