




Laserliner PipeControl Mobile set



Video inspection system with practical camera unit for mobile use

Rev18W02

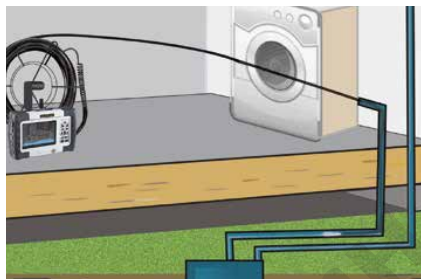

VideoControl-Master

- Large, high resolution 5.0" colour display
- Integrated still image and video recording function with snapshot option for image documentation during video recording.
- Adjustable, **digital zoom function** with large and high resolution zoom range.
- **Image rotation** in 90° increments
- **Image comparison function:** Compares the current image with a reference image
- **Data storage** on SD card, max. 16 GB
- USB 2.0 port
- External monitors operated via **TV Out connection**
- **Multilingual On-Screen-Display**
- **Interchangeable camera unit**
- **Li-ion battery** for up to 4 hours of continuous operation



VideoControlSnake-Camera

- **20 mm stainless steel camera head**
- **No pull-back** thanks to **flexible coil spring**
- Powerful object lighting
- **Sturdy, hand-held reel** with 15 m cable
- Stable, reinforced feed cable (ø 5.8 mm)
- Suitable for 40 mm tubes with 90° bend



5.0" TFT colour display

Camera head with 10 high-performance LEDs

TECHNICAL DATA

VIDEOCONTROL-MASTER
SCREEN TYPE 5.0" TFT colour display
DISPLAY RESOLUTION 640 x 480 pixels
CONNECTIONS Industrial connector for camera TV-Out, USB 2.0, SD card slot, 5V DC power pack
FORMAT PICTURE / IMAGE RESOLUTION JPEG format, 640 x 480 pixels
VIDEO FORMAT / IMAGE REFRESH RATE NTSC / 30 frames / sec
LED 10 luminosity degrees
ZOOM 2 x digital zoom in 10% steps
MEMORY SD card, max. 16 GB
AUTO SHUT OFF 5 min / 10 min / 15 min / 30 min (adjustable)
POWER SUPPLY Li-Ion rechargeable battery / power pack
OPERATING TIME 4h
OPERATING TEMPERATURE -10 ... 60°C
SNAKE-CAMERA
TYPE OF CAMERA CMOS image sensor
CAMERA HEAD / CABLE ø 25 mm, IP 67
CAMERA RESOLUTION 640 x 480 pixels
FIELD OF VISION 127°
FOCAL DEPTH 2 ... 6 cm
CABLE LENGTH 15 m
REEL DIAMETER 31 cm
MINIMUM BENDING RADIUS 70 mm
OPERATING TEMPERATURE -10 ... 60°C



VideoControlSnake set

- + VideoControl-Master
- + VideoControlSnake-Camera
- + power supply/battery charger
- incl. Sortimo® L-BOXX® 238
- + 4 GB SD-card
- + USB-cabel
- + AV-cabel
- + carrying strap
- + software

Packing dimension (W x H x D)
442 x 253 x 357 mm

ARTICLE	ARTICLE NO.	EAN CODE	PU
VideoControl-Snake Set	084.115L	4 021563 702886	1

VIDEOCONTROL-MASTER



CAMERA

