



**Cordless Hammer Driver Drill**  
**Cordless Driver Drill**  
**Cordless Impact Driver**

Satisfy Professional's Needs



Cordless Hammer Driver Drill  
**DHP482**

Cordless Driver Drill  
**DDF482**

Cordless Impact Driver  
**DTD152**

Bits not included.

# High Speed



**DHP482**

**1,900** High Speed


Predecessor model: 1,500rpm



**DDF482**

**1,900** High Speed

Predecessor model: 1,500rpm

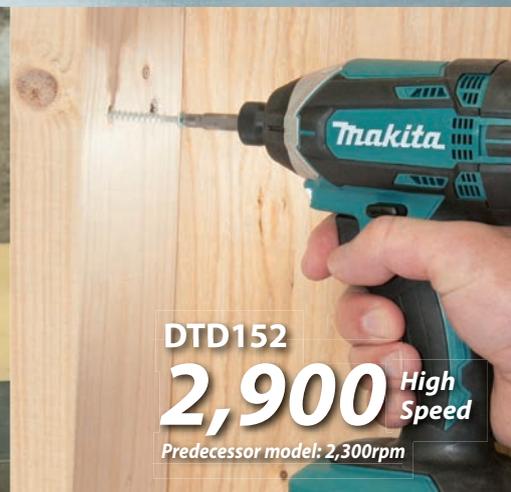

**DTD152**

**2,900** High Speed

Predecessor model: 2,300rpm

# Compact overall length for increased maneuverability

← 198mm DHP482 →



## LED Job light with pre-glow functions

On pulling switch trigger, the light automatically turns on before motor starts turning.



## Compact belt clip



For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.



## Battery

- BL1850 : 5.0Ah
- BL1840 : 4.0Ah
- BL1830 : 3.0Ah
- BL1815N : 1.5Ah



## Fast Charger DC18RC

\* Charging time 22min.

## Charger DC18SD

\* Charging time 60min.



## Dual Rapid Charger DC18RD

\* Charging time 45min.



## 4-Port Charger DC18SF

\* Sequential charging time 60min.



\* With BL1830 : 3.0Ah

## More Torque

DTD152: 165N•m

Predecessor model: 160N•m

DHP482/DDF482: 62N•m

Predecessor model: 50N•m

## Ergonomically designed handle with soft grip



**A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened according to the U-shape formed between user's thumb and index finger.

**B** Rubberized soft grip provides comfortable grip and more control while minimizing hand fatigue and pain.

## All metal gear construction

All metal gear construction for extra-high transmission durability

(DHP482, DDF482)



## 21 stages Torque Settings

(DHP482, DDF482)

Predecessor model: 16 stages



## Cordless Hammer Driver Drill

**DHP482** 13mm

440

## Cordless Driver Drill

**DDF482** 13mm

440

- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Keyless Chuck
- Torque Setting 21
- Built-in Job Light
- Carrying Case



	DHP482	DDF482
<b>Capacity</b>	Steel : 13mm Wood : 38mm Masonry : 13mm	Steel : 13mm Wood : 38mm
<b>Impacts per minute (ipm)</b>	Hi : 0-28,500 Lo : 0-9,000	-
<b>No load speed (rpm)</b>	Hi : 0-1,900 Lo : 0-600	Hi : 0 - 1,900 Lo : 0 - 600
<b>Max. fastening torque</b>	62N.m	62N.m
<b>Dimensions (L x W x H)</b>	198x79x249mm	185x79x249mm
<b>Net Weight*</b>	1.5kg with BL1815N 1.8kg with BL1850	1.5kg with BL1815N 1.7kg with BL1850

**Standard Equipment :** Fast Charger, Battery Cartridge, (+) (-) Bit, Belt clip

## Cordless Impact Driver

**DTD152Z** (Available as Skin only)

448

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case



	DHP482	DDF482
<b>Capacity</b>	Machine screw : M4 - M8 (5/32 - 5/16") Standard bolt : M5 - M16 (3/16 - 5/8") High tensile bolt : M5 - M12 (3/16 - 1/2") Coarse thread (in length) : 22 - 125mm (7/8 - 4-7/8")	
<b>Impacts per minute (ipm)</b>	0 - 3,500	
<b>No load speed (rpm)</b>	0 - 2,900	
<b>Max. fastening torque</b>	165N.m	
<b>Dimensions (L x W x H)</b>	137x79x238mm	
<b>Net Weight*</b>	1.3kg with BL1815N 1.5kg with BL1850	

\*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.



**Makita New Zealand Ltd.**  
15 Orbit Drive, Mairangi Bay  
PO Box 100 914, North Shore, Auckland 0745  
Fax 0800 600 601 Sales 09 479825

Visit our website for information and tool features :

[www.makita.co.nz](http://www.makita.co.nz)