



# Angle Grinder Paddle Switch Trigger series



Photo: GA5050

## Powerful 1,300 W Motor with Paddle Switch Trigger



Photo: GA5052



**Angle of side grip to  
gear housing: 110°**

100mm	115mm	125mm	
GA4050	GA4550	GA5050	
GA4050R	GA4550R	GA5050R	Soft start/ Anti-restart function
GA4051R	GA4551R	GA5051R	Undetachable wheel cover Soft start/ Anti-restart function



**Angle of side grip to  
gear housing: 90°**

115mm	125mm	
GA4552	GA5052	
GA4552R	GA5052R	Soft start/ Anti-restart function
GA4553R	GA5053R	Undetachable wheel cover Soft start/ Anti-restart function

### Easy-to-operate large paddle switch trigger

works properly wherever the user holds the barrel grip.



### High durability

cutting and grinding, due to longer service life of motor, carbon brushes, etc.



### Enhanced shaft locking mechanism

- Gear housing is redesigned to prevent breakage of the shaft locking mechanism.
- Large size lock pin cap allows for normal shaft locking operation even with a thick-gloved finger.



### Machined bevel gears

### Toolless wheel cover (Slide lever style)

allows for fast and easy angle adjustment and installation/removal of wheel cover.

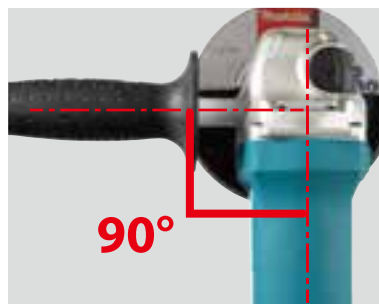


Photo: GA5050

## Angle of side grip to gear housing



GA4050/ GA4550,  
GA5050  
GA4050R/ GA4550R/  
GA5050R  
GA4051R/ GA4551R/  
GA5051R



GA4552/ GA5052  
GA4552R/ GA5052R  
GA4553R/ GA5053R



#### Anti-drop holders

allows to attach anti-drop strap, etc.



#### Easy-to-hold barrel grip

provides less hand fatigue and more control of the machine due to:

- Grip circumference smaller than 9564P series
- Ergonomic design



#### With soft start

GA4050R/ GA4051R/ GA4550R/ GA4552R/ GA4551R/ GA4553R/ GA5050R/ GA5052R/ GA5051R/ GA5053R

minimizes start-up shock and makes the tool start smoothly

#### With anti-restart function

GA4050R/ GA4051R/ GA4550R/ GA4552R/ GA4551R/ GA4553R/ GA5050R/ GA5052R/ GA5051R/ GA5053R

Minimizes accidental start-up even if the tool is plugged to power source with the switch "ON".

#### Undetachable wheel cover

GA4051R/ GA4551R/ GA5051R/ GA4553R/ GA5053R

designed not to be easily detached by user (for construction workers, metal workers, etc.)

Model No.	Wheel size			Angle of side grip to gear housing	Soft start	Anti-restart function	Undetachable wheel cover
	100mm	115mm	125mm				
	GA4050	GA4550	GA5050	110°	-	-	-
	GA4050R	GA4550R	GA5050R		●	●	-
	GA4051R	GA4551R	GA5051R		●	●	●
	-	GA4552	GA5052	90°	-	-	-
	-	GA4552R	GA5052R		●	●	-
	-	GA4553R	GA5053R		●	●	●

## Accessories

### Dust collection wheel guard

A: for offset diamond wheel

B: for diamond wheel



Part No.	Size	Type
*191F81-2	125mm	A
*191G06-2	125mm	B



\*Cannot be installed undetachable wheel cover models

### Cutting wheel cover attachment for cutting work

Can be attached to the wheel cover for grinding with easy assembling.

Part No.	Size
199709-0	115mm
199710-5	125mm



### Wheel cover

for cut-off wheel

Part No.	Size
*162555-4	100mm
*162556-2	115mm
*162557-0	125mm



### Vibration proof grip set

Part No. 194514-0



### Dust cover attachment set

Part No. 199514-5



## Angle Grinder

## Paddle Switch Trigger series

260

Double Insulation

Soft Start  
(GA4050R, GA4051R, GA4550R, GA4551R, GA4552R, GA4553R, GA5050R, GA5051R, GA5052R, GA5053R)

Dust Collection  
(GA4050/R, GA4550/R, GA5050/R, GA4552/R, GA5052/R)

	GA4050	GA4550/ GA4552	GA5050/ GA5052
<i>Anti-restart function model</i>	GA4050R	GA4550R/ GA4552R	GA5050R/ GA5052R
<i>Anti-restart function model Undetachable wheel cover model</i>	GA4051R	GA4551R/ GA4553R	GA5051R/ GA5053R
<b>Continuous rating input</b>	1,300W	1,300W	1,300W
<b>Wheel Diameter</b>	100 mm (4")	115 mm (4-1/2")	125 mm (5")
<b>No Load Speed (RPM)</b>	11,000	11,000	11,000
<b>Vibration Level (Normal side grip)</b>	Surface Grinding: 6.5 m/s <sup>2</sup> Disc Sanding: 2.5 m/s <sup>2</sup> or less	Surface Grinding: 7.0 m/s <sup>2</sup> Disc Sanding: 2.5 m/s <sup>2</sup>	Surface Grinding: 7.5 m/s <sup>2</sup> Disc Sanding: 2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	91 dB(A)	91 dB(A)	91 dB(A)
<b>Sound Power Level</b>	102 dB(A)	102 dB(A)	102 dB(A)
<b>Dimensions (L x W x H)</b>	325x117x110 mm (12-3/4"x4-5/8"x4-5/16")	325x130x117 mm (12-3/4"x5-1/8"x4-5/8")	325x140x117 mm (12-3/4"x5-1/2"x4-5/8")
<b>Net weight</b>	GA4050/R: 2.3-2.6 kg (5.1-5.7 lbs.) GA4051R: 2.3-2.5 kg (5.1-5.5 lbs.)	GA4550/R, GA4552/R: 2.4-2.8 kg (5.3-6.2 lbs.) GA4551R, GA4553R: 2.5-2.7 kg (5.5-6.0 lbs.)	GA5050/R, GA5052/R: 2.5-2.8 kg (5.5-6.2 lbs.) GA5051R, GA5053R: 2.5-2.7 kg (5.5-6.0 lbs.)
<b>Power supply cord</b>	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)

#### Standard Equipment :

Depressed Center Wheel, Side Grip, Wheel Cover, Lock Nut Wrench

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202009