




## 360° line laser with hand-held receiver mode and magnetic clamp and wall bracket for varied applications

- Green 360° line laser
- Very bright, green laser cross
- Automatic alignment thanks to magnetically damped pendulum system
- Additional slope function
- Optimised for work close to the ceiling
- Individually switchable laser lines
- GRX-Ready: integrated handheld receiver mode
- Magnetic clamp and wall bracket – ideal for horizontal and vertical mounting on drywall construction profiles

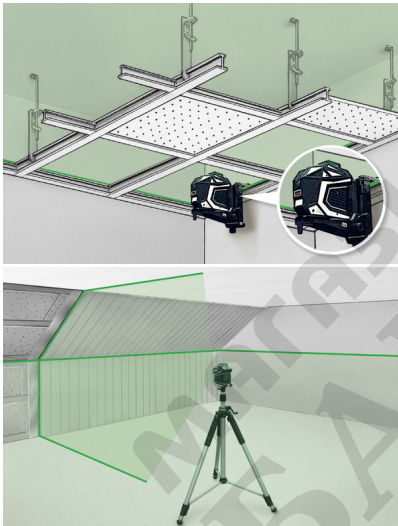

### TECHNICAL SPECIFICATIONS

SELF-LEVELLING RANGE	± 3°
ACCURACY	± 0.2 mm / m
LEVELLING	automatic
VISIBILITY (typical)*	40 m
WORKING RANGE WITH HAND RECEIVER	(depends on how the technology affects the difference in brightness) 60 m
LASER WAVELENGTH	515 nm
LASER CLASS	2 / < 1 mW (EN 60825-1:2014/AC:2017)
POWER SUPPLY	Li-ion battery pack 3.7V / 1.7Ah Power supply 5V/DC / 2000mAh
OPERATING TIME	approx. 10 hours
OPERATING CONDITIONS	0°C ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-10°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	122 mm x 121 mm x 75 mm
WEIGHT	638 g (incl. battery pack)


\* at up to 300 lux



Optional: RangeXtender G 60  
Artikel-Nr. 033.55A



LONG  
OUTDOOR  
RANGE  
60m

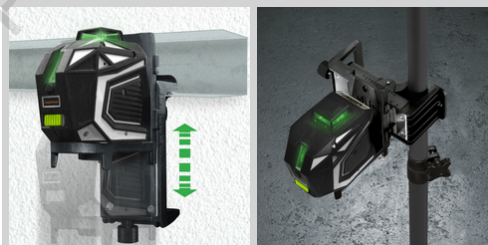

X1-Laser

Item no. 031.500A

EAN-CODE 4021563709663

PU 1