




## The specialist in renovation

XM-2 650 – optimum mixing  
in the shortest possible time with perfect  
material characteristics

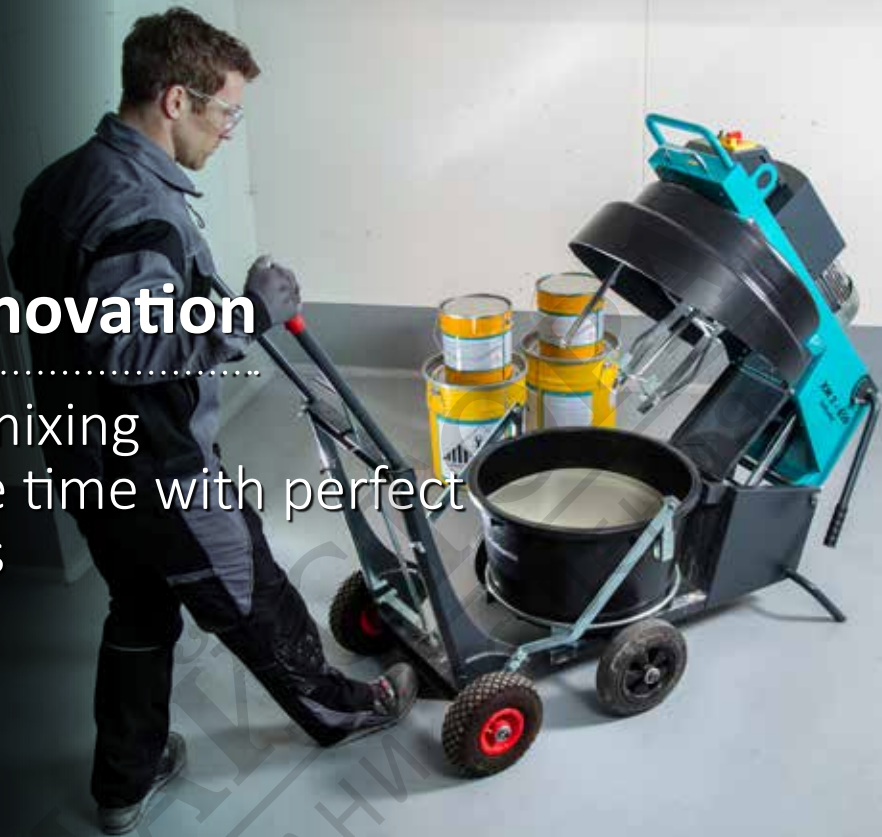


## › Materials and applications



· Re-profiling mortar ·



· Synthetic resin coating ·

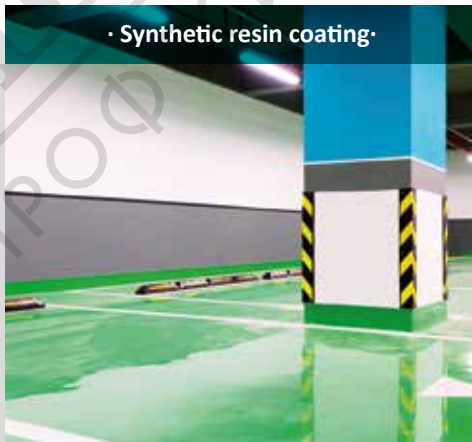

Synthetic resin mortar




· Restoration plaster ·



· Pavement grout ·




· Casting mortar ·

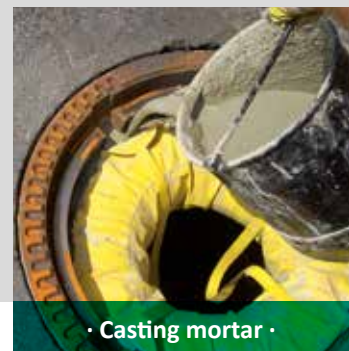


# XM-2 650 forced-action mixer

- Forced-action mixer with high torque for fast and optimised mixing with perfect material characteristics.
- Ideal for industrial floor coatings, reaction resin systems, concrete renovation, ETICS, blast furnace construction, sewer and water pipe renovation, floor construction, etc.
- 2 sets of mixing bodies with different speeds, plus edge scraper
- High hourly throughput thanks to short mixing times (-1 to /h) and easy operation
- Configurable timer (90, 180 sec., permanent mode)
- A transport trolley accessory completes the system
- Recommended by leading building chemical manufacturers
- 2 models with 230 and 400 volt motors

XM 160 XM 195



▶ Tool set 1\*



▶ Tool set 2\*\*

XM 160 SR 160



▶ Additional accessory: Transport trolley

▶ Scope of delivery

## Material (weight without the addition of water) \*WS1 \*\*WS2

|   |   |   |
|---|---|---|
| Earth-moist concrete -16 mm grain size  | + | - |
| Cement screed                           | + | - |
| Prebagged loam rendering without fibres | + | - |
| Heat insulation plaster                 | + | - |
| Breathable lightweight render           | + | - |
| Natural stone mortar/cobblestone mortar | + | - |
| 2K pavement grout (up to 1.2 mm)        | + | - |
| Tile adhesive(flexible mortar)          | + | - |
| thin/fluid screed types                 | + | + |
| thin/fluid mortar types                 | + | + |
| Bonding agents as rendering base        | - | + |
| Grout                                   | + | - |
| Joint-sealing compounds                 | - | + |
| Bonding agents                          | - | + |
| 2K seaming slurries                     | - | + |
| Levelling compounds                     | - | + |
| 2K epoxy resin sand mixture             | + | - |
| Heat insulation adhesive                | + | - |
| High-performance mortar (Flowstone)     | + | - |
| Restoration plaster                     | + | - |
| 2K re-profiling mortar                  | + | - |
| Cast concrete                           | - | + |
| Synthetic resin mortar                  | + | + |
| Synthetic resin coatings                | - | + |

## Technical data

|                              |                         |
|------------------------------|-------------------------|
| Mixing quantity:             | up to 50 litres         |
| Bucket capacity:             | 65 litres               |
| Mixing tool output:          | 1.1/1.5 kW   230/400 V  |
| Speed of mixing tool:        | 2 x 185   1 x 670 rpm-1 |
| Scraper speed:               | 40 rpm <sup>-1</sup>    |
| Weight (empty):              | 105 kg                  |
| Dimensions:                  | 107.5 x 73 x 84.5 cm    |
| XM 2 - 230 V item no.:       | 39014                   |
| XM 2 - 400 V item no.:       | 39016                   |
| XM 160 mixing tool item no.: | 70153                   |
| XM 195 mixing tool item no.: | 70155                   |
| SR 160 mixing tool item no.: | 70157                   |
| 65 L mixing bucket item no.: | 60403                   |
| Transport trolley item no.:  | 70183                   |

Your Collomix specialised dealers:



Product video



Collomix GmbH | Daimlerstr. 9 | 85080 Gaimersheim | Germany  
Tel. (08458) 32 98 0 | Fax (08458) 32 98 30 | info@collomix.de | www.collomix.com



YouTube