

DistanceMaster LiveCam




Multi-functional laser distance measuring device with HD camera spotter and digital connection

Perpendicular areas, circular areas, circular volumes, triangular areas and trapezoidal areas can be determined using this multi-functional laser distance measuring device. It can also determine indirect heights and take point-to-point measurements. An HD camera also acts as an effective spotter during measurement. Due to its long measuring range of up to 150 m, this device is ideal for long distances and can also be used outdoors. Protection to IP 65 ensures the device is both dust- and splash-proof. Housing reference point options, front, back or tripod. Easy to use due to short measuring time, timer function for automatic triggering, and easy-to-read display. 30 memory locations are available to record results. The measurement data can be quickly transferred to mobile devices via the digital connection using the free MeasureNote app. Energy-saving Auto Off function when not in use.

- Einfaches Messen, Addieren und Subtrahieren von Längen, Flächen und Volumen

TECHNICAL SPECIFICATIONS

PRECISION (TYPICAL)*	± 1.5 mm
MEASUREMENT RANGE (INSIDE)**	0,2 m - 150 m
LASER WAVELENGTH	635 nm
LASER CLASS	2 / < 1 mW (EN 60825-1:2014/AC:2017)
MEMORY	50 storage locations
POWER SUPPLY	3 x 1.2V HR03 (AAA) NiMH
OPERATING CONDITIONS	-10°C ... 40°C, Luftfeuchtigkeit max. 20 ... 85% rH, nicht kondensierend, Arbeitshöhe max. 2000 m über NN (Normalnull)
DIMENSIONS (W X H X D)	54 mm x 130 mm x 28 mm
WEIGHT	184 g (inkl. Akkus)
	* measuring distance up to 10 m with strongly reflective target surface and at room temperature. The measurement deviation may increase by ± 0.2 mm/m for greater distances and under unfavourable measuring conditions such as strong sunlight or weakly reflective target surfaces. ** at max. 15,000 lux

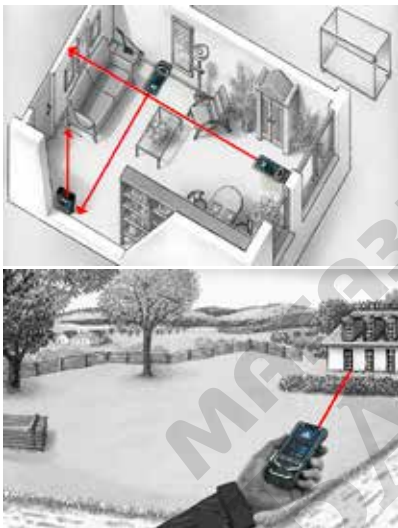

DistanceMaster LiveCam ORDER NO. 080.985A EAN-CODE 4021563716289 PU 1