

# 40V Max Brushless 600mm / 750mm Hedge Trimmers



HEAVY DUTY BRUSHLESS



# Product Statement




The 40V Max Brushless Hedge Trimmers are designed for high frequency commercial users. Featuring angled teeth, designed to provide a large cut capacity of 25mm and a smooth cutting action of up to 4,000spm.

Low vibration construction protects the battery terminals and end user's hands for long periods of comfortable use. The 5-position rotatable rear handle provides further ease of use particularly for vertical or horizontal operation.

The 3 stage speed control allows the user to adjust the operating strokes per minute and the reverse function operates to remove a jam.



# Product Overview

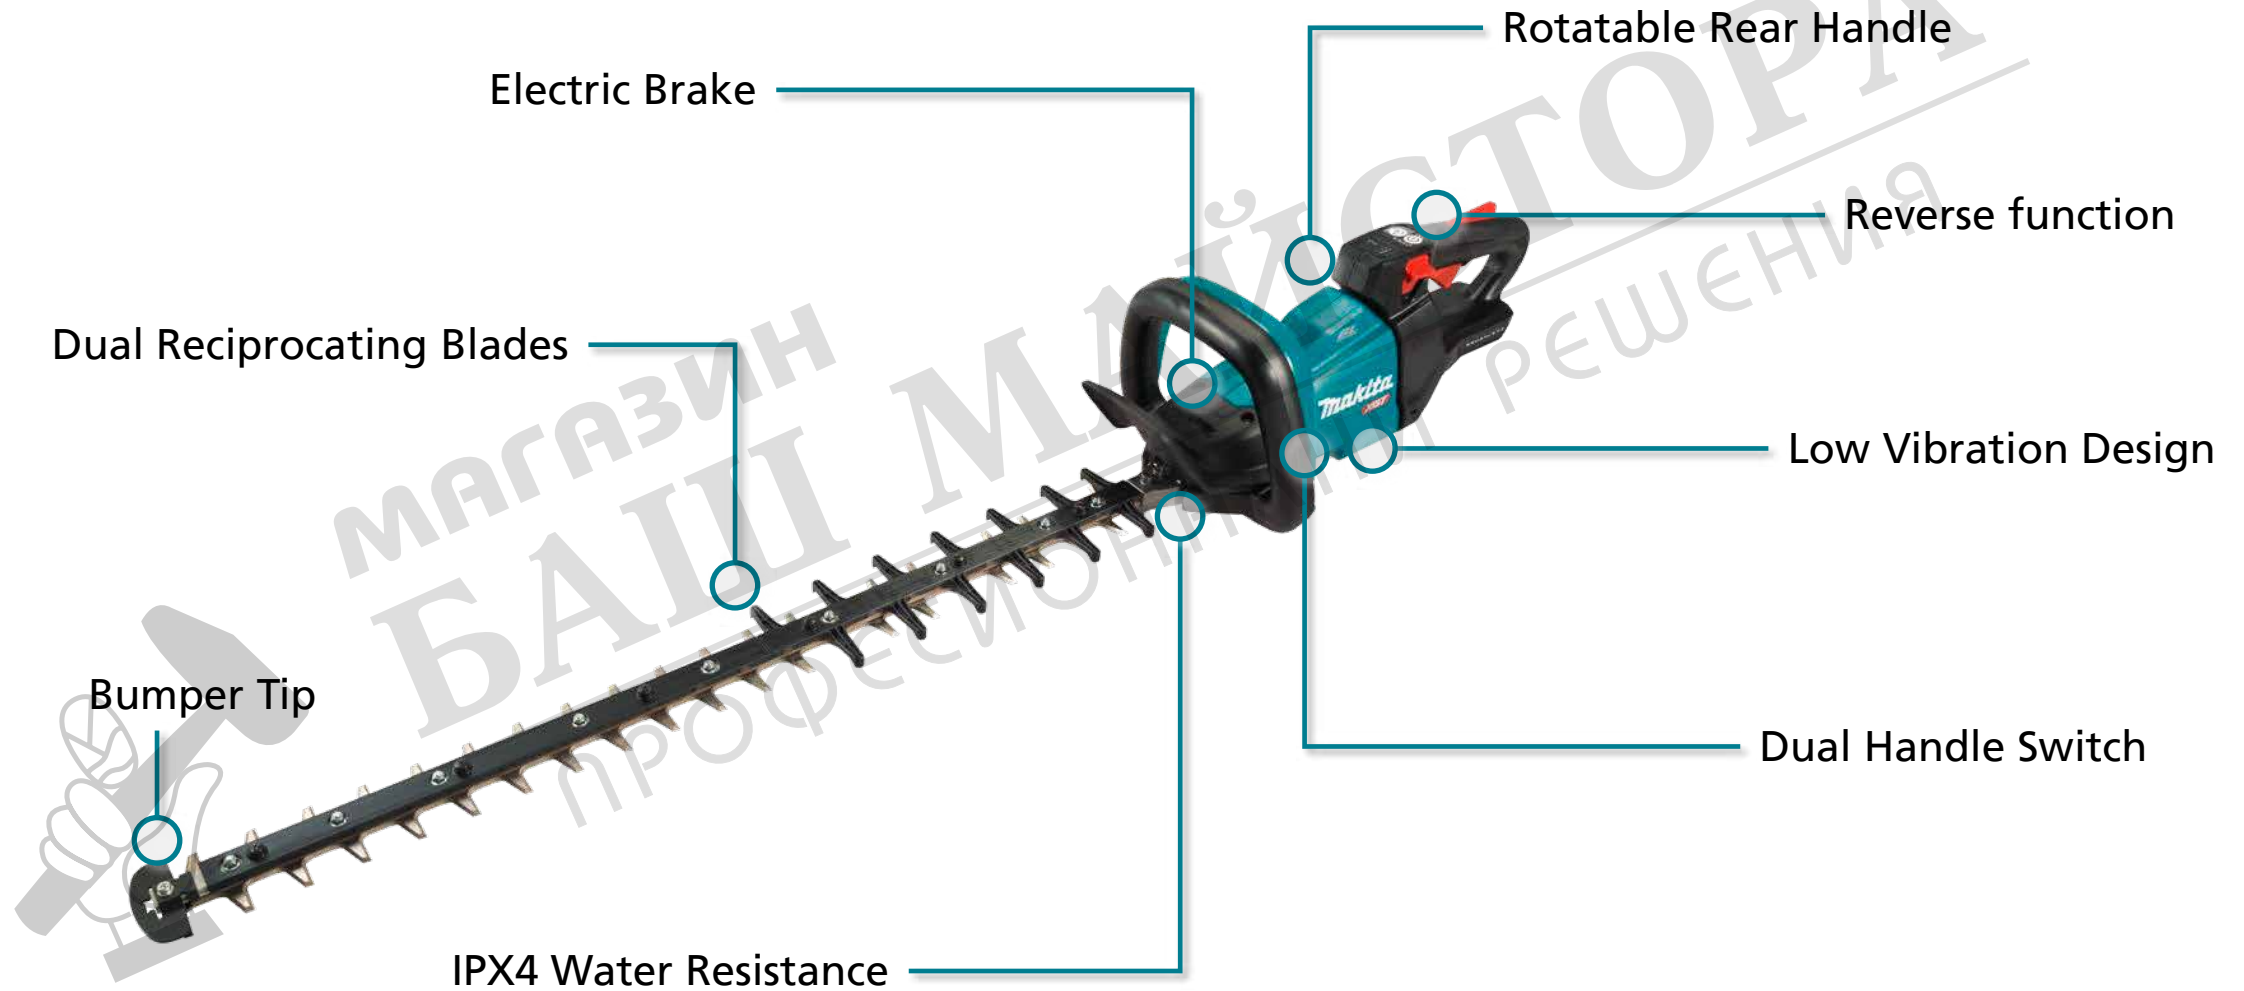

# Product Specifications



| Model                         | UH006 / UH007                                       |
|-------------------------------|-----------------------------------------------------|
| Max. output power             | 720W                                                |
| Cutting strokes per minute    | 2,000spm / 3,000spm / 4,000spm                      |
| Maximum branch diameter       | 25mm                                                |
| Vibration (m/s <sup>2</sup> ) | Front Handle – 3.0 / 3.4<br>Rear Handle – 2.4 / 3.1 |
| Overall length                | 1,123mm / 1,274mm                                   |
| Skin weight                   | 3.4kg / 3.6kg                                       |
| Weight (with BL4040)          | 4.4kg / 4.6kg                                       |
| Voltage                       | 40V Max                                             |

- **High Power Output** – the high power 40Vmax XGT Li-Ion battery allows for continuous operation in heavy-duty applications. Delivering up to 4,000 cutting strokes per minute for fast smooth cutting.
- **Large Cutting Capacity** – angled tooth design provides increased cutting capacity
- **Reverse Mode** – In the event of a jammed blade, reverse mode cycles the blades backwards to release any debris before automatically returning to forward operation.
- **3 Speed Selection** – 3 speeds allow the user to achieve longer runtimes and adjust the speed to suit the application.
- **IPX4** – High resistance to water penetration to allow the machine to be used in rainy weather without risk of damage.
- **Bumper Tip** – Protects the tip of the blade assembly from sudden jolts against the ground reducing risk of damage.
- **Constant Speed Control** – Electronic speed control ensures smooth cutting and consistent strokes per minute in a range of applications.
- **Low Vibration Design** – Vibration suppression system reduces vibration transmitted through the handles for long periods of comfortable operation.

## Heavy Duty Power



Powered by XGT 40V Max batteries for continuous heavy duty operation

## Performance



Angled teeth provide increased cutting capacity for rough cutting

## Ergonomics



Rotatable rear handle to provide optimum handling for vertical or horizontal hedging



## Safety



Two handed operation keeps hands away from cutting blades for added safety



|                                                        | UH008                          | UH009     | UH006                          | UH007     |
|--------------------------------------------------------|--------------------------------|-----------|--------------------------------|-----------|
| Max. output power                                      | 720W                           |           | 720W                           |           |
| Cutting length                                         | 600mm                          | 750mm     | 600mm                          | 750mm     |
| Cutting strokes per minute                             | 2,000spm / 3,600spm / 5,000spm |           | 2,000spm / 3,000spm / 4,000spm |           |
| Maximum branch diameter                                | 21.5mm                         |           | 25mm                           |           |
| Vibration (m/s <sup>2</sup> )<br>(Front / Rear Handle) | 3.1 / 2.4                      | 3.2 / 2.5 | 3.0 / 2.4                      | 3.4 / 3.1 |
| Overall length                                         | 1,120mm                        | 1,262mm   | 1,123mm                        | 1,274mm   |
| Skin weight                                            | 3.3kg                          | 3.5kg     | 3.4kg                          | 3.6kg     |
| Weight (with BL4040)                                   | 4.3kg                          | 4.5kg     | 4.4kg                          | 4.6kg     |

| Standard Accessories                                                              |          |                     |
|-----------------------------------------------------------------------------------|----------|---------------------|
|  | 412911-1 | Blade Cover (UH006) |
|  | 412912-9 | Blade Cover (UH007) |



МАГАЗИН МАЙСТОРА  
 БАШ МАЙСТОРА  
 ПРОФЕСІОНАЛНИ РЕШЕНИЯ