

# 40V Max Brushless Dust Blower



HEAVY DUTY BRUSHLESS

AS001G



## 40V Max Brushless Dust Blower

The Makita 40V Max XGT Brushless Dust Blower (AS001G) provides a high-powered blowing force for a wide range of applications whether is cleaning up the in the workshop, removal of dust from pilot holes for anchors or inflating pool toys on the weekend.

With one touch quick change nozzle replacement the nozzles can quickly and easily be changed to suit the application. With wind speeds up to 200m/sec and a 4-stage electronic speed control clean up or inflation is a breeze. The AS001G is the perfect addition to any kit, tool box or workshop.



# Product Overview



One touch nozzle replacement


Tether point

LED joblight

Detachable filter

Variable speed trigger

Lock on switch

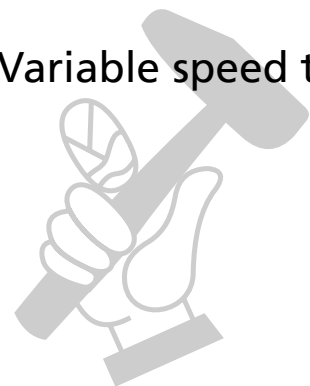

4 stage air volume



МАГАЗИН  
БАШ  
ПРОФЕСИОНАЛЬНЫЕ РЕШЕНИЯ  
СТОРА

# Product Specifications



Max. air volume	1.1m <sup>3</sup> /min
Max. air velocity	200m/sec
Blowing force	2.8N
Max. sealed suction	10.3kPa
Overall length	181mm
Skin weight	0.9kg
Weight (with battery)	1.9kg (BL4040)
Voltage	40V Max

- **One touch nozzle replacement** – nozzle accessories quickly and easily snap on and off. To install push the nozzle firmly into the lock sleeve. To remove rotate the nozzle in the direction of the arrow to release.
- **LED joblight** – with pre-glow and after glow functions to illuminate the work area.
- **Variable speed trigger** – trigger control of air speed in order to comfortably control the blowing force in each application.
- **4 stage air volume** – push button dial controls the maximum blowing force in 4 stages allowing for higher degree of control.
- **Tether point** – safe hanging point for users required to secure the tool in over head applications.
- **Detachable filter** – filter prevents foreign objects from being suck in the machine. Filter can also be removed and cleaned should debris become stuck in the filter.
- **Lock on switch** – trigger switch can be locked in the ON position for use in extended applications.

## Heavy Duty Power




Powered by XGT 40V Max batteries  
Providing 2.8N of blowing force

## Convenience



One touch nozzle replacement

## Control

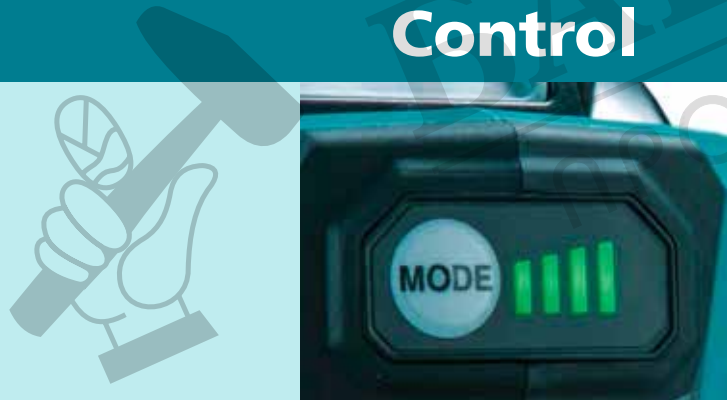

Variable speed dial and trigger for optimal  
airflow in wide variety of applications

## Runtime




Continuous runtime with 2.5Ah (BL4025)  
Mode 1: 50mins / Mode 4: 13mins

## Wide Variety of Applications

### For blowing / cleaning



 Blowing Nozzle\*



 Dusting Nozzle\*



 Confined Space Nozzle\*




 Wide Nozzle\*




 Flex Nozzle

### For inflating / deflating




 Pinch Valve Nozzle\*








 Rubber Nozzle



 Suction Nozzle

\*Included as standard Accessory

Standard Accessories		
	191X19-5	<u>Wide Range Nozzle</u> Application: 120° spread for wide range dusting
	191X11-1	<u>Confined Space Nozzle</u> Application: For cleaning narrow spaces
	191X13-7	<u>Dusting Nozzle</u> Application: For air filter cleaning
	191X15-3	<u>Blowing Nozzle</u> Applications: dusting down applications and inflating large play pools, etc.
	191X17-9	<u>Pinch valve nozzle</u> Application: For inflating/deflating inner tubes and beach balls

Optional Accessories		
	191X21-8	<u>Flex Nozzle</u> Application: For dusting down computer equipment or narrow spaces where this machine cannot access
	191X23-4	<u>Air vent hose complete</u> Application: inflating/deflating inner tubes and beach balls. Remove dust cap from this machine and attach this hose.
	191X25-0	<u>Rubber Nozzle</u> For deflation large play pools and inflatable beds etc. Used by attaching to blowing nozzle.
	191X27-6	<u>Rubber Suction Nozzle</u> For deflating. Used by attaching to blowing nozzle.
	191X29-2	<u>Intake filter</u> Dust filter designed for use of the machine in a dusty environment
	191X78-9	<u>Long Nozzle</u> Application: For cleaning anchor holes and cleaning narrow spaces that are out of reach