

### Standard Equipment

- ✓ Electric safety limit switch
- ✓ Switch with IP 55 no-volt coil and IP 67 plug
- ✓ Placing handle
- ✓ N. 2 standard shatter-resistant poly drums suitable for low temperatures **LONG LIFE**
- ✓ N. 1 3-action paddle
- ✓ Packing: cardboard

### Optional Accessories

- ✓ Residual current device kit (RCD)
- ✓ Kit with 5 drums **LONG LIFE**

**115V/60Hz SPH** **220V/60Hz SPH**

**MOTOR AVAILABLE**


✓ **Mix-ALL**

**NEW**

### Applications

Ideal for small building sites or refurbishment work. Lightweight, compact and very quiet, it is suitable for professional use. Specifically designed for mixing self-levelling material, fiber reinforced material and concrete repair material.

**Homogeneous and no trapped air perfect mixing.**

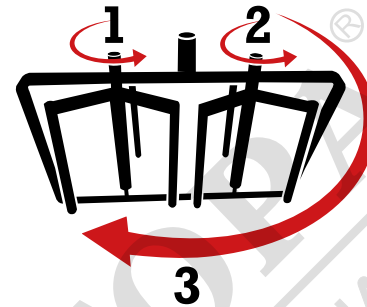

## NEW PADDLE

### 3-ZONE MIXING ACTION



**NEW DRUM**  
EXTRA LONG LIFE

#### MIX-ALL

Drum capacity	l	56
Mixing performance	l	47
Drum diameter	mm	580
Paddle speed	rpm	55
Electric motor power rate 230V/50Hz	kW	0.55
Running current	A	5
SPL in operator's position	dB(A)	59
Machine weight (packing)	Kg	30 (32)
Dimensions w/l/h (packing)	mm	580/630/795 (585/620/455)