

MOVER 270d EVO

Pneumatic conveyor for conventional and premixed floor screeds, with high performance and automatic pumping cycle

APPLICATIONS

For conveying conventional and premixed floor screeds



MOVER 270db EVO Diesel engine

- With loading bucket
- Cod. 1106225



MOVER 270dbr EVO Diesel engine

- Towable
- With loading bucket
- Cod. 1106220



Double acting lift cylinder



Loading bucket with high slope (up to 65°)



High noise absorption engine bonnet



Chassis approved up to 140 km/h
(Road towing speed is defined in each country by the respective road code)



Mixing system with reversal of rotation direction



FAST-LOCK compressor-Diesel engine direct coupling



Tank internal protections in wear resistant steel




Yanmar Diesel engine 35 kW, 4-cylinder

Standard Equipment

- ✓ FAST-LOCK built-in compressor with direct drive
- ✓ Certified pressure tank 270 l
- ✓ 195 R14 tyres
- ✓ Non road-towable drawbar (Mover 270db)
- ✓ Road-towable drawbar, parking brake and light units (Mover 270dr/270dbr)
- ✓ Loading bucket (Mover 270 db / dbr)
- ✓ 20+10+10 m material hose Ø 60 mm with cam couplings
- ✓ Tripod stand with Ø 60 mm coupling
- ✓ 2 hose holder fittings
- ✓ Material outlet manifold Ø 60 mm
- ✓ Built-in hydraulic power system
- ✓ Manual grease pump
- ✓ Box for cleaning accessories
- ✓ Central lifting hook for controlled balance
- ✓ Multifunction hour meter
- ✓ Telescopic outrigger pads

Optional Accessories

- ✓ Automatic timed grease system
- ✓ High pressure cleaner 140 bar

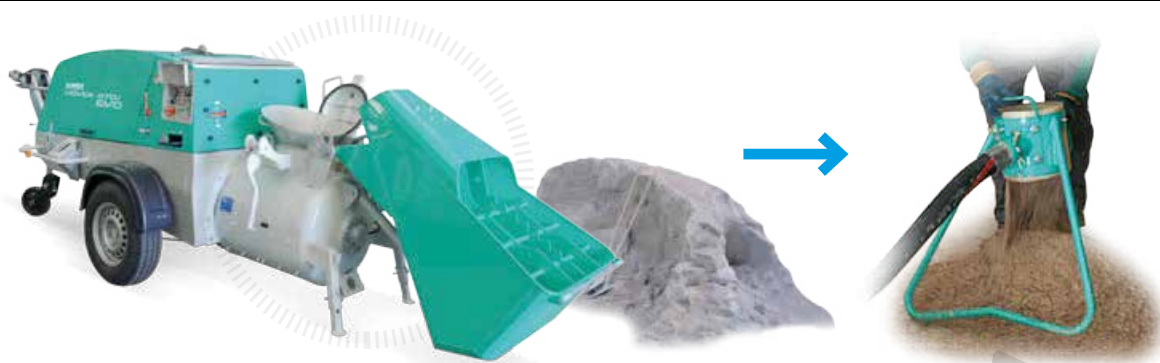

Jet breaker stand



- Automatic pumping cycle with progress indicator
- Adjustable mixing time cycle
- Adjustable pipes emptying automatic cycle
- FULL-CHECK automatic self-diagnostic panel
- Multifunction hour meter with machine parameters indicator
- SMARTSTOP fuel reserve

✓ Quick compressed air connection

✓ Self-steering tug axle with reinforced wheel

✓ Pressurized hatch gasket for wear recovery



FAST-FLOW cooling system



Hatch with built-in safety valve for easy and safe handling



Drawbar with lights (road-towable version "R")



Cable and rope coilers with scraping shovel (optional)

		Mover 270db EVO	Mover 270dr EVO	Mover 270dbr EVO
Motor power rate	kW	35	35	35
Compressor flow rate	l/min	4340	4340	4340
Compressor max. pressure	bar	7	7	7
Max. transportable grain size	mm	12-16	12-16	12-16
Average cycle output	l	220	220	220
Tank capacity	l	270	270	270
Loading height	mm	660	1000	660
Dimensions width/length/h	mm	1470/4903/2521 with bucket raised	1470/4963/1603	1470/4903/2521 with bucket raised
Weight	kg	1760	1680	1790
Sound pressure level	dB (A)	< 99	< 99	< 99
Loading bucket	-	yes	no	yes
Road towing kit	-	no	yes	yes