



**Cordless
Circular Saw
C 3606DA**



**BRUSH
LESS**
Brushless Motor

**DEEP
CUT**
66mm

Specifications

| Model | | C 3606DA | |
|------------------------|---------------|--|-----------------|
| Capacity | Blade Dia. | 165mm (6-1/2") | |
| | Max Cut Depth | 90° | 66mm (2-19/32") |
| | | 45° | 45mm (1-49/64") |
| | -5° | 57mm (2-1/4") | |
| Voltage | | 36V | |
| No Load Speed | Power Mode | 4,300/min | |
| | Silent Mode | 2,000/min | |
| Overall Length | | 292mm (11-1/2") | |
| Weight*1 | | 3.4kg (7.5lbs.) with BSL 36A18 | |
| Standard Accessories*2 | | 2 Batteries (BSL 36A18), Charger (UC 18YSL3), Blade, Wrenches, Guide*3, Battery Cover, Carrying Case | |

*1 Weight according to EPTA-Procedure 01/2003.
*2 The included batteries and charger vary by country or area.
*3 For EU only.

MV The MULTI VOLT Series
MULTI VOLT



Cordless
Driver Drill
DS 36DA



Cordless
Impact Driver Drill
DV 36DA



Cordless
Impact Driver
WH 36DB



Cordless
Rotary Hammers
DH 36DPA
DH 36DPB
DH 36DPC
DH 36DPD



Cordless
Disc Grinders
G 3613DA
G 3613DB
G 3612DA
G 3610DA
G 3610DB

Cordless Circular Saw

36V-2.5Ah C 3606DA



MV
MULTI VOLT
AC POWER. DC FREEDOM.



Hitachi Koki Co., Ltd.

www.hitachi-koki.com

Distributed by:



MV
MULTI VOLT
AC POWER. DC FREEDOM.



MV
MULTI VOLT
 AC POWER. DC FREEDOM.

DEEP CUT
66mm


Max Cutting Depth of 66mm

BRUSHLESS
 Motor


C 3606DA
Cordless Circular Saw

Best in class¹
Cutting Performance


Best in class¹ Cutting Speed

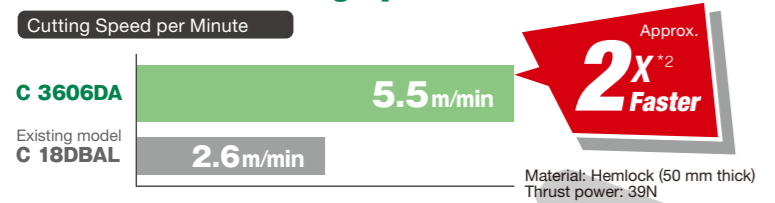

Best in class¹ Overload Capacity

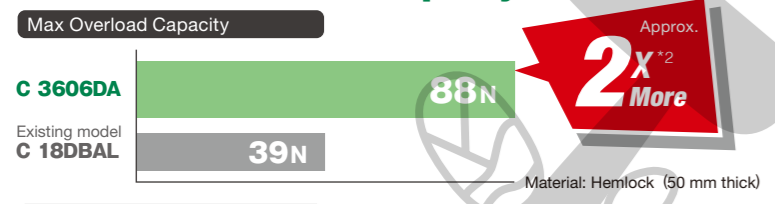

Runtime per Charge^{*3} (When using BSL 36A18)

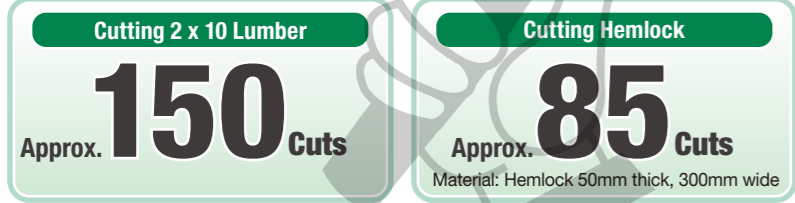

| | | | |
|---------------------------------|---|--------------------|-----------------|
| Cutting Depth Adjustment System | Parallelism Adjustment System | High-intensity LED | Blower Function |
| -5° Bevel Setting | Backward Saw Dust Exhaust (connectable to a dust extractor) | Soft Start | Fluorine Plate |


Lightweight and Compact for Easier Handling

Designed with the center of gravity close to the handle, the circular saw offers superior maneuverability and greatly reduces user fatigue.

292mm Overall Length

3.4kg Light Weight

188mm Overall Width

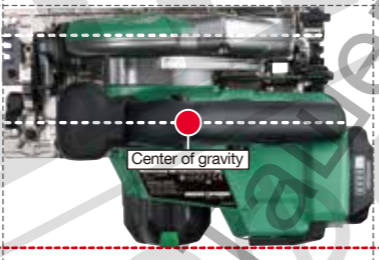

Flat Motor Housing!

Quick and Easy Blade Change


The flat motor housing design with soft material on the surface provides the circular saw with stability when it's laid on its side. This makes blade change easier and also prevents the workpiece from being scratched.



Silent Mode

Ideal for applications in noise-sensitive areas, such as renovation and interior work.

The Silent Mode improves motor efficiency, while lowering the noise. The operation mode automatically switches to the Power Mode when the motor load increases, enabling smooth cutting according to cutting conditions.

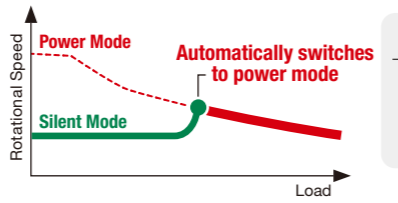

Noise Level

Reduced by approx. 5dB
 (in comparison with power mode)

Overload Protection

Monitors changes in the motor's rotation speed and stops the motor the instant it detects a sudden drop in speed due to the saw blade becoming bound, etc.

Depending on operating conditions, Overload Protection may not work or may not provide the specified performance. Make sure that the work piece is placed and supported properly, and that the main unit is held firmly during cutting. Additionally, carefully read "CORDLESS CIRCULAR SAW SAFETY WARNINGS" in the instruction manual.

^{*1}: As of December 2017. Among 165mm cordless circular saws made by leading power tool manufacturers. (Surveyed by Hitachi Koki).
^{*2}: In comparison with the Existing model C 18DBAL. The value varies according to the workpiece material and operating conditions.
^{*3}: The runtimes are for reference purposes. They may vary according to the workpiece material and operating conditions.

MV
MULTI VOLT
 AC POWER. DC FREEDOM.

1,080W
High Power Output

The MULTI VOLT battery, paired with MULTI VOLT 36V tools, offers unprecedented cordless power **over 1,000W** with its size and weight.

Compact & Lightweight


The MULTI VOLT battery has **almost the same size and weight of a 18V battery** (BSL 1850/BSL 1860), and produces the power of a 36V.

Same Size



Automatic Voltage Change between 36V and 18V

The MULTI VOLT battery is designed for **full compatibility with the current 18V slide range**, and **automatically changes between 2 voltages**, 36V^{*1} 2.5Ah and 18V 5.0Ah, according to the tool used.

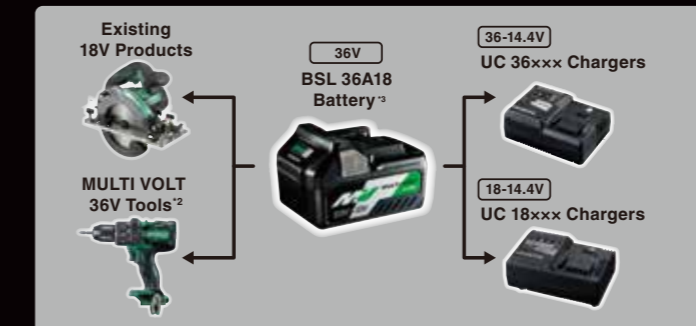

Remaining Battery Indicator



Displays the charging state in four stages.

BSL 36A18 MULTI VOLT Battery

| | | |
|---------------------|---|-----------------------------------|
| Voltage& Capacity | 36V-2.5Ah / 18V-5.0Ah | |
| Cooling System | Yes | |
| Dimensions | 116 x 69 x 76 mm (4-9/16" x 2-23/32" x 2-63/64") | |
| Charging Time | Approx. 32 min. ^{*4} (when using the UC 18YSL3) | |
| Compatible Products | 18V | All existing 18V slide-type tools |
| | 36V | MULTI VOLT 36V tools |
| Compatible Chargers | All chargers compatible with slide-type Lithium-ion batteries | |

^{*1}: Compatible with MULTI VOLT 36V tools only.
^{*2}: Not compatible with the following existing batteries: BSL 3620/3625/3626/3660, BSL 18xx and BSL 14xx series.
^{*3}: Not compatible with the existing 36V products that are compatible with BSL 3620, BSL 3625, BSL 3626 or BSL 3660.
^{*4}: The actual charging time can be longer depending on the surrounding temperature and battery condition.