



Cordless Circular Saw HS012G 165 mm (6-1/2")



40V Li-ion max



Max Cutting capacity

57 mm

Bevel angle: 0°

Work amount on a full battery charge BL4025

approx **110** cuts.

Test material: 50mm x 300mm Melapi

Lightweight

at **3.2** kg

with BL4025



Excellent combination of high power and lightweight design



Tool hanger




Metal guide for cutting line



Magnesium diecast
Base plate, Safety cover and Blade case

Compact design

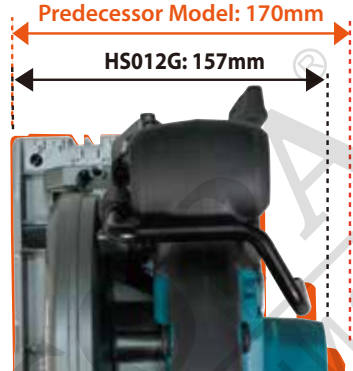

Electric brake



eXtreme Protection Technology



Auto-start Wireless System



connects to compatible vacuum cleaners via Bluetooth.

Bevel range



Positive bevel stop
(at 22.5° and 45°)
(0° - right: 50°)

Twin LED Job light



with preglow and afterglow functions

Large lock-off lever



Accessories

Specialized EFFICUT blade




Size (mm)	Part No.
165x 1.4 x 20 x 25T	B-63018

Guide rail adapter, Guide rail and Guide rail bag

Guide rail adapter
Part No. 196953-0

Overall length (m)	Guide rail	Guide rail bag
	Part No.	Part No.
1	199140-0	E-05670
1.4	194368-5	E-05664
1.5	199141-8	E-05664
1.9	194925-9	E-10920
3	194367-7	E-10936

Clamp set



Part No. type A: 194385-5
type B: 199826-6

Bevel guide set



Adjustable angle of Guide rail
Part No. 196664-7

Guide rail Joint connector 2pc set



Part No. 198884-9
198885-7(EU)

Charging Time

Battery Model	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min
BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Circular Saw

HS012G 165 mm (6-1/2")

- Brake
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

Wheel Diameter	165 mm (6-1/2")
Hole Diameter	20 mm (13/16")
Max Cutting Capacity	0°: 57 mm (2-1/4") 45°: 41 mm (1-5/8")
No Load Speed (RPM)	5,200
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	wo/ Battery: 298 x 157 x 246 mm (11-3/4 x 6-3/16 x 9-11/16") w/ BL4020 / BL4025: 352 x 157 x 246 mm (13-7/8 x 6-3/16 x 9-11/16") w/ BL4040: 359 x 157 x 246 mm (14-9/64 x 6-3/16 x 9-11/16") w/ BL4050F: 388 x 157 x 246 mm (15-1/4 x 6-3/16 x 9-11/16") w/ BL4080F: 406 x 157 x 246 mm (16 x 6-3/16 x 9-11/16")
Net weight	3.2 - 4.4 kg (7.1 - 9.7 lbs.)

Standard Equipment: TCT saw blade, Hex wrench, Dust nozzle, Guide rule (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202301