


Adjustable Torque Wrench

Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
 Tolerance of torque $\pm 4\%$ (CW)
 CW/CCW Direction

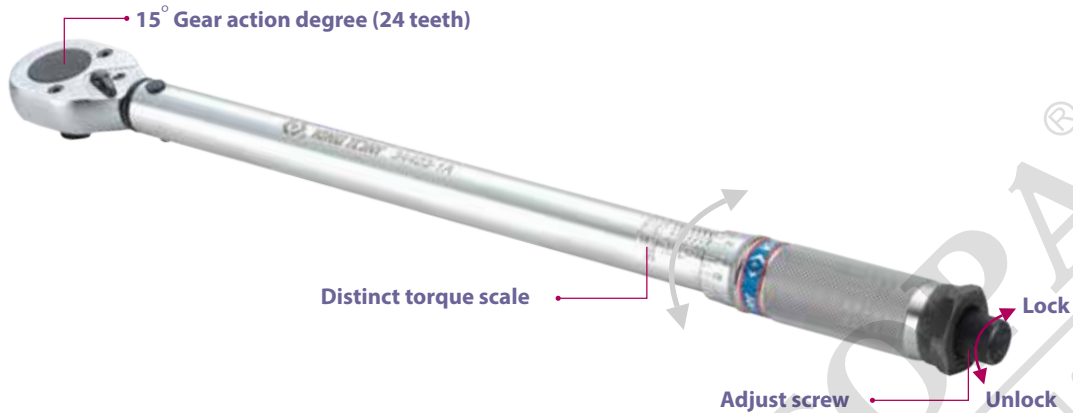

Dual Scale - Newton Meter & Kilogram-force Centimeter / Kilogram-force meter (N-m & kgf-cm / kgf-m)


KT NO.	Square drive	Torque range N-m	Incr.	Torque range kgf-cm / kgf-m	Incr.	Overall length mm		
● 34223-1A	1/4"	5~25 N-m	0.1 N-m	51~255 kgf-cm	1 kgf-cm	280	595	1 / 12
● 34323-1A	3/8"	5~25 N-m	0.1 N-m	51~255 kgf-cm	1 kgf-cm	280	595	1 / 12
● 34323-2A	3/8"	20~110 N-m	1 N-m	2.04~11.22 kgf-m	0.1 kgf-m	370	820	1 / 12
● 34423-1A	1/2"	42~210 N-m	1 N-m	4.3~21.4 kgf-m	0.41 kgf-m	450	1340	1 / 12
● 34423-2A	1/2"	70~340 N-m	3 N-m	7.1~34.7 kgf-m	0.27 kgf-m	570	2400	1 / 12

Dual Scale - English & Kilogram-force Centimeter / Kilogram-force meter (in-lb / ft-lb & kgf-cm / kgf-m)

KT NO.	Square drive	Torque range in-lb / ft-lb	Incr.	Torque range kgf-cm / kgf-m	Incr.	Overall length mm		
● 34223-1B	1/4"	55~250 in-lb	1.5 in-lb	63~288 kgf-cm	1.13 kgf-cm	280	595	1 / 12
● 34323-1B	3/8"	55~250 in-lb	1.5 in-lb	63~288 kgf-cm	1.13 kgf-cm	280	595	1 / 12
● 34323-2B	3/8"	15~80 ft-lb	0.5 ft-lb	2.1~11.10 kgf-m	0.07 kgf-m	370	820	1 / 12
● 34423-1B	1/2"	30~150 ft-lb	1 ft-lb	4.2~20.8 kgf-m	0.14 kgf-m	450	1340	1 / 12
● 34423-2B	1/2"	50~250 ft-lb	2 ft-lb	6.9~34.6 kgf-m	0.27 kgf-m	570	2400	1 / 12

Dual Scale - Newton Meter & English (N-m & in-lb / ft-lb)

KT NO.	Square drive	Torque range in-lb / ft-lb	Incr.	Torque range N-m	Incr.	Overall length mm		
● 34223-1C	1/4"	55~250 in-lb	1 in-lb	6.2~28.2 N-m	0.17 N-m	280	595	1 / 12
● 34323-1C	3/8"	55~250 in-lb	1 in-lb	6.2~28.2 N-m	0.17 N-m	280	595	1 / 12
● 34323-2C	3/8"	15~80 ft-lb	0.5 ft-lb	20.3~108.5 N-m	0.68 N-m	370	820	1 / 12
● 34423-1C	1/2"	30~150 ft-lb	1 ft-lb	40.7~203.4 N-m	1.35 N-m	450	1658	1 / 12
● 34423-2C	1/2"	50~250 ft-lb	2 ft-lb	67.8~339 N-m	2.71 N-m	570	2400	1 / 12

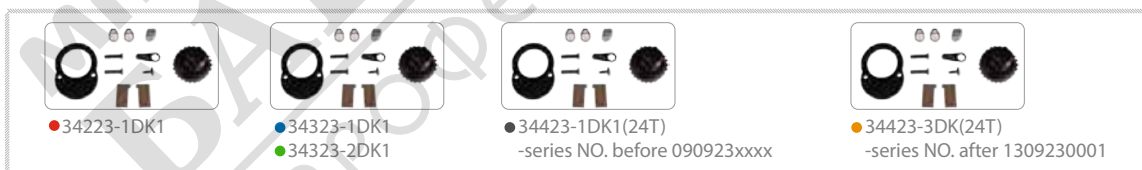

Adjustable Torque Wrench Set

344251A12MR

1/2"

Blow case size (mm) :
 500 x 125 x 70 (0.15cuft)

Contents

2.85 1 / 10

	34423-1A	42~210 N-m
	4335MR	13, 14, 15, 16, 17, 18, 19, 21, 22, 24
	4251-04R	



12 PC.