


Laserliner®

SensoLite 110 Set




Laser receiver for red rotary lasers

Rev.12.15

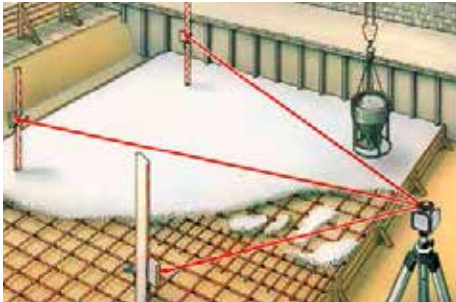

- **Fast alignment work** in close and long range
- The **LC display on the front** and the acoustic signals show the height of the laser beam.
- The **universal mount** enables the device to be attached to levelling staffs.
- **Loud piezo-buzzer** possible
- **Head magnet**

Not suitable for green lasers.

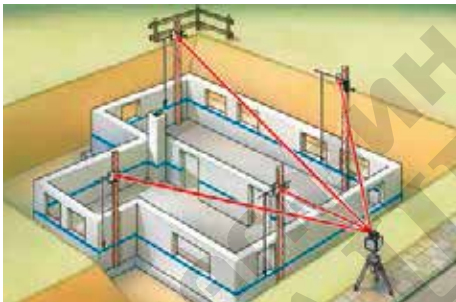

TECHNICAL DATA

LASER RECEPTION RANGE
1 - 100 m (depends on the rotary laser)

LENGTH OF RECEIVER UNIT 52 mm

NECESSARY ROTATION SPEED
300 - 1100 r/min

WATER AND DUST PROTECTION IP 54

POWER SUPPLY
2 x 1.5 V alkaline batteries (type AAA)

DIMENSIONS (W x H x D)
without universal mount
60 x 110 x 23 mm

WEIGHT with batteries /
without universal mount: 138 g

max.
100 m



Max. reception range
100 m



Including
universal mount



Head magnet



SensoLite 110 Set
including universal mount
+ batteries

ARTICLE	ARTICLE-NO	EAN-CODE	PU
SensoLite 110 Set	028.65	4 021563 694792	1

