


Laserliner

SmartVision-Laser Plus



Green cross-line laser with universal clamping bracket

Rev.18W/04

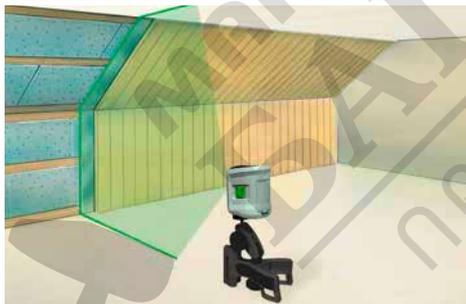

SmartVision-Laser


- **Green laser technology**
- Extremely bright green laser cross at front in the **DLD design achieves high-quality lines** as well as a clean and clear and therefore easily visible line image.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines
- **Additional slope mode** to align angled surfaces.
- **Out-Off-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport Lock:** a pendulum lock protects unit during transport.
- Green laser technology with 0°C...50°C temperature range

FlexClamp Plus

- **Easy-to-adjust clamping bracket** for optimum use of cross line lasers in interior finishing applications
- **Versatile damage free mounting options** for surfaces
- **Easy-to-adjust** height and position of the measuring device
- Suitable for all laser measuring devices with 1/4" threads

TECHNICAL DATA

SELF-LEVELLING RANGE ± 5°
ACCURACY ± 0.4 mm / m
LEVELLING automatic
OPERATING RANGE (depending on room illumination) 20 m
LASER WAVELENGTH 510 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 2 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME 15 hours (alkaline batteries)
OPERATING CONDITIONS 0 ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS -10°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W x H x D) 60 x 90 x 77 mm (SmartVision-Laser)
WEIGHT incl. batteries 275 g (SmartVision-Laser)

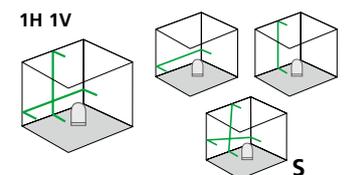

SmartVision-Laser set
inclusive SmartVision-Laser
+ FlexClamp Plus
+ carrying case
+ laser enhancement glasses
+ batteries

Packing dimension (W x H x D)
340 x 275 x 123 mm



Automatic Level



Pendulum can be locked for protection during transport



Adjustable and free mounting options



FlexClamp Plus with base support

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartVision-Laser Plus	081.337A	4 021563 701964	4

