



TipTest Duo Set



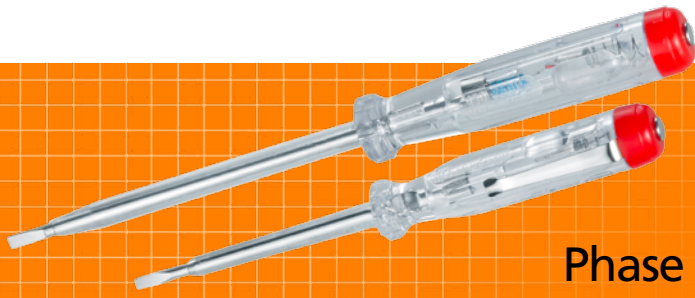


Phase tester for quickly checking the L-conductor at electrical connections

Rev.0116

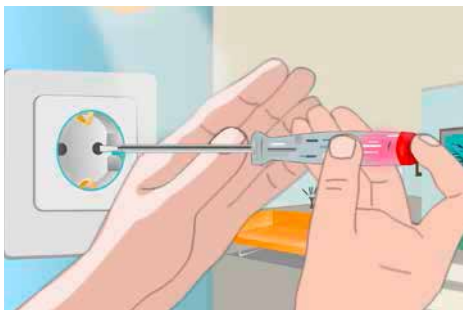

- **Reliable and fast** phase testing
- Locates the **L-conductor** in electrical installations
- Can be used for measurements at EU-standard sockets
- **Simple to use and well-proven** testing aid
- **Compact design** with convenient clip, practical for shirt pockets and tool boxes
- High quality, sturdy **VDE GS tested design**
- Two phase testers of different lengths

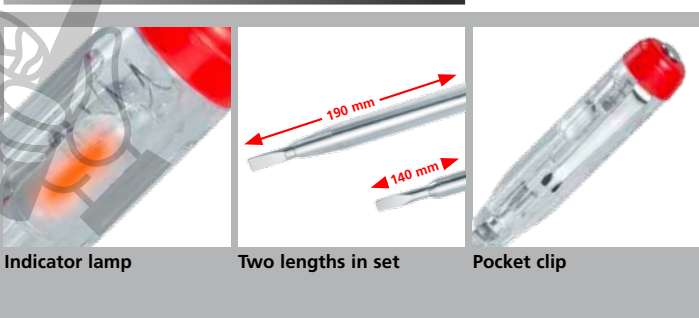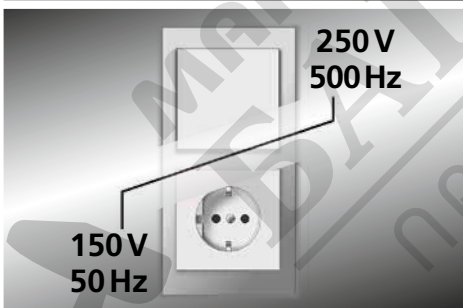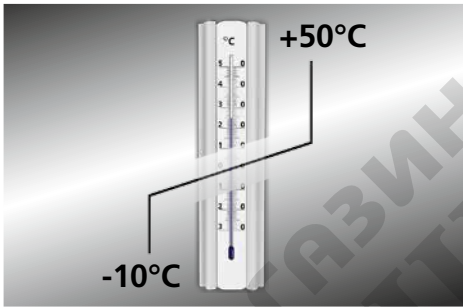

ARTICLE	ARTICLE NO	EAN-CODE	PU
TipTest Duo set	083.009A	4 021563 695645	5



TECHNICAL DATA

VOLTAGE RANGE
150 - 250 V

FREQUENCY RANGE
50 - 500 Hz

INDICATOR
Indicator lamp

POLLUTION DEGREE 2

HUMIDITY
Max. 80% relative air humidity
(no condensation)

DEGREE OF PROTECTION IP20

STORAGE TEMPERATURE -10°C ... 70°C

OPERATING TEMPERATURE -10°C ... 50°C

DIMENSIONS (W x H x D)
Short phase tester: 16 x 140 x 18 mm
Long phase tester: 18 x 190 x 18 mm

WEIGHT
Short phase tester: 18 g
Long phase tester: 29 g



TipTest Duo set
- 2 phase testers

Packing dimension (W X H X D)
65 mm x 240 mm x 20 mm