

Jump Starter and Power Bank

Jump starter and Power Bank with lithium battery
(LiPo technology = lithium polymer battery).

- **Quick start of motorcycles, cars and vans with 12V battery.**
- **SMART BOOSTER CABLE** (models 10K e 15K)
It protects against reverse polarity and short circuit and it prevents jump start operation if the FAST battery is discharged (voltage below 11V), preserving the device itself.
- **Powering smartphones, laptops, tablets and other commonly used portable devices.**
- **High J-BME3s:**
it is the energy supplied by the jump starter within three seconds of cranking to keep the engine run.
- **Reduced weight and size**
the lithium battery stores four times the energy of a lead battery with the same weight.
- **Quick charge**
- **High brightness LED lamp**
with selectable fixed lighting, flashing alarm and SOS signal.

	FAST 7K	FAST 10K	FAST 15K
Input voltage	-	1 Ph - 100/240V 50/60 Hz	
Boosting voltage	12V	12V	12V
Boosting current max	1000A	1300A	1500A
Boosting current (1V/C)	350A	400A	500A
Battery capacity	6000mAh	10000mAh	15000mAh
Battery types	Automotive: Pb (WET - AGM - GEL) - Lithium (LiFePO4)		
J-BME3s (Joule-Battery Maximum Energy)	4000J	6000J	8000J
For engines up to Ta = 25°C	Petrol	2500cc	3500c
	Diesel	-	2500cc
USB output	5V - 2,1A	5V - 2,1A	5V - 2,1A
DC output	-	19V - 3,5A	19V - 3,5A
Input (Jack)	-	14V - 1A	14V - 1A
Input (Micro-USB)	5V - 1A	5V - 1A	5V - 1A
Charging time	6h	3h	5h
Dimensions	135 x 76 x 16	170 x 82 x 32	170 x 82 x 32
Weight	0,25 kg	0,4 kg	0,5 kg
Version			
With accessories	380600	380700	380800



BC01.1

STAY CHARGED!

Jump Starter



PETROL
DIESEL

Power Bank



design: www.ramstudio.com

AA0127 - The manufacturer does not accept any responsibility for any typing or printing errors in this catalogue.

www.decacharge.com



DECA S.p.A.
Strada dei Censiti, 10
Zona Industriale Rovereta
47891 Falciano - Repubblica di San Marino

Tel. da/from Italy **0549 910711**
from other Countries **+378 0549 910711**
Fax da/from Italy **0549 908360**
from other Countries **+378 0549 908360**



yellow energy

FAST 15K
12V JUMP STARTER

J-BME₃₅ ENERGY!




Jump Starter

12V - 1500A (peak) - 8000J J-BME₃₅



Power Bank

USB 5V - 2,1A
DC 19V - 3,5A output

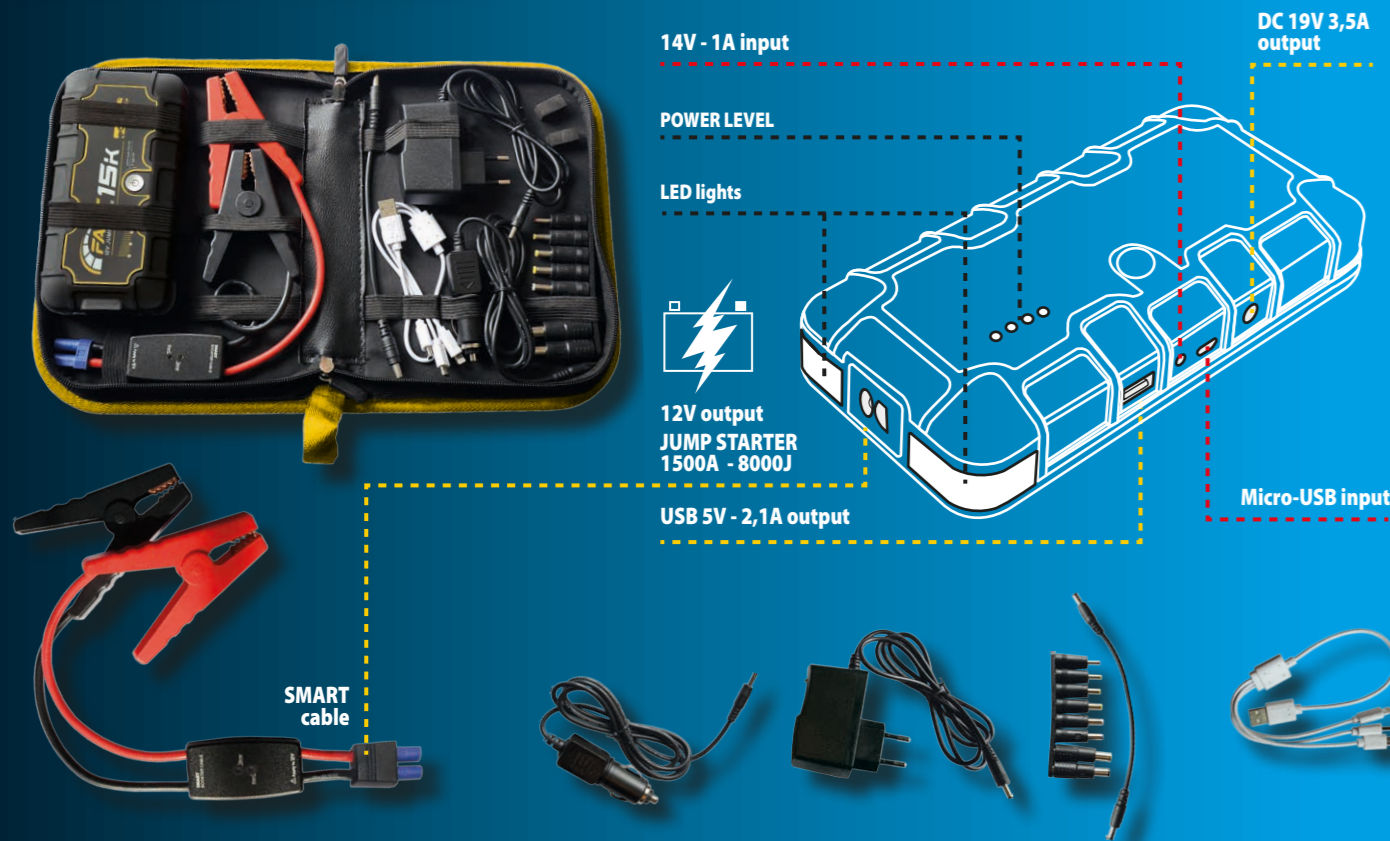

FAST 10K
12V JUMP STARTER

J-BME₃₅ ENERGY!





Jump Starter

12V - 1300A (peak) - 6000J J-BME₃₅



Power Bank

USB 5V - 2,1A
DC 19V - 3,5A output

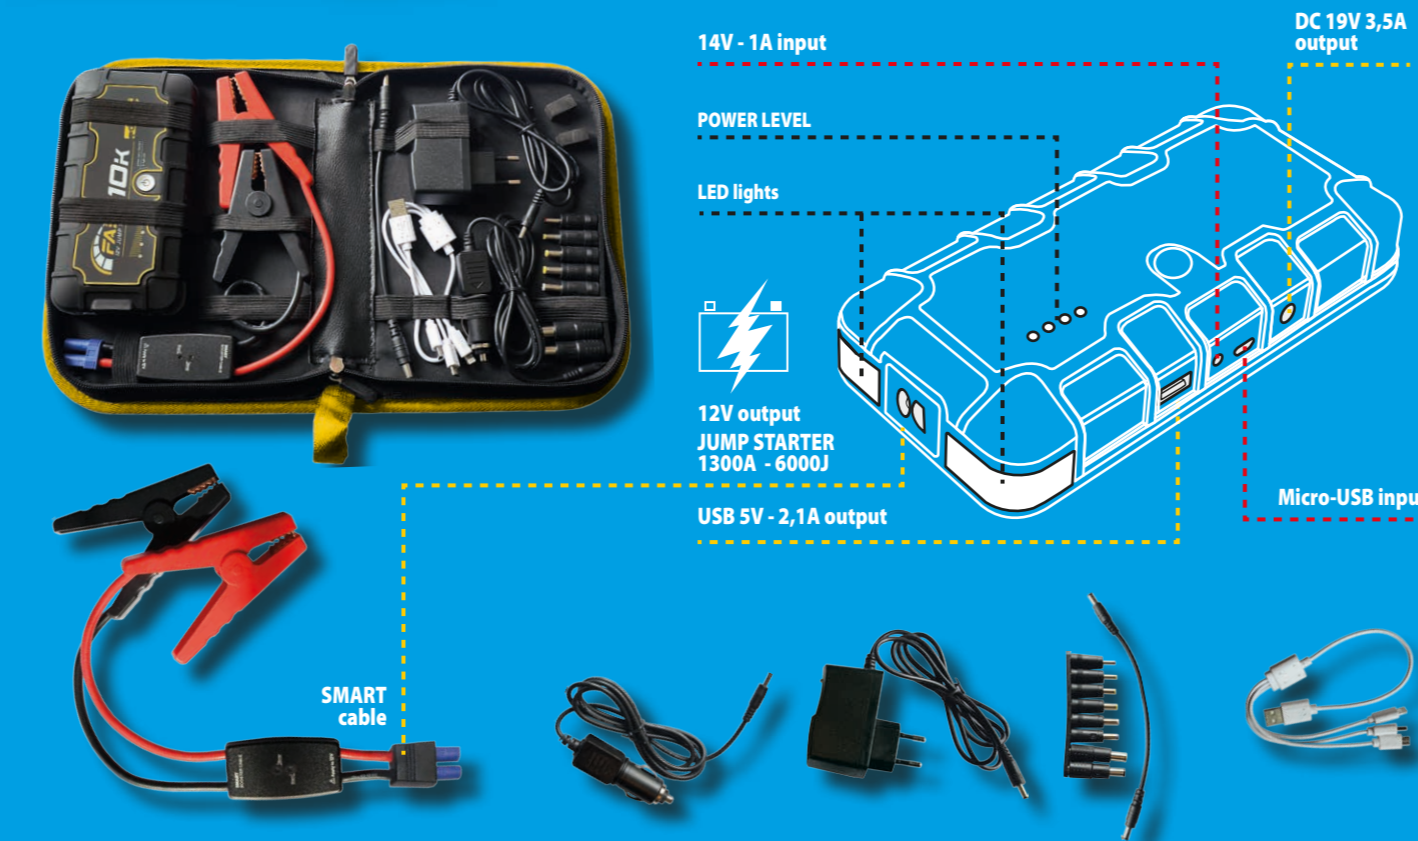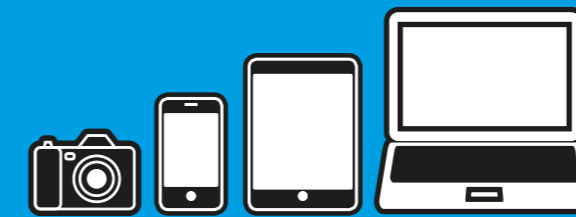

FAST 7K
12V JUMP STARTER

J-BME₃₅ ENERGY!



Jump Starter

12V - 1000A (peak) - 4000J J-BME₃₅



Power Bank

USB 5V - 2,1A output

