
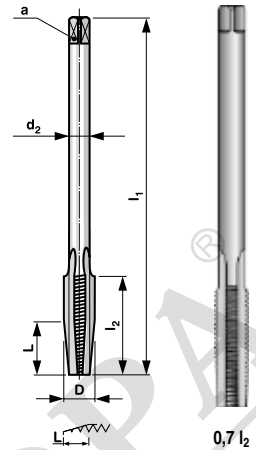


ČSN 22 3064

NO/CS/WS
code 139 XXX

Závitníky maticové Nut taps Muttergewindebohrer Метчики гаечные



Lícování: A / Tolerance: A /
Toleranz: A / Подгонка: A

Trubkový závit
Pipe thread
Rohrgewinde
Трубная резьба

G (BSP)

D	z/1"	P	l ₁	l ₂	d ₂	a		code NO/CS/WS
G 1/16"	28	0,907	140	20	5,6	6	4,50	139 116
G 1/8"	28	0,907	140	20	8	6,3	6,30	139 180
G 1/4"	19	1,337	180	30	10	8	8,00	139 140
G 3/8"	19	1,337	200	30	12,5	10	10,00	139 380
G 1/2"	14	1,814	220	40	14	12,5	12,50	139 120
G 5/8"	14	1,814	220	40	18	14	14,00	139 580
G 3/4"	14	1,814	250	40	20	16	24,50	139 340
G 1"	11	2,309	280	60	25	20	30,75	139 100

Materiál: NO
Provedení: nebroušený závit
Závit: pravý

Material: CS-carbon steel
Execution: non-ground thread
Thread: right-hand



Werkstoff: WS-Werkzeugstahl
Ausführung: nicht geschliffenes Gewinde
Gewinde: rechts

Материал: NO-инструментальная сталь
Изогнотовлено: нешлифованная резьба
Резьба: правая

PN 8/3016

HSS
code 940 XXX

Závitové bity Screwdriver-bits Gewindebohrer-Bits Метчики с шестигранным держак



Lícování: 2N / Tolerance: 2N /
Toleranz: 2N / Подгонка: 2N

Metrický závit
Standard metric thread
Metrische Regelgewinde
Метрическая резьба

M

D	P	l ₁	l ₂		k	code HSS
M 3	0,5	40	13	2,50	1/4"	940 030
M 4	0,7	40	12	3,30	1/4"	940 040
M 5	0,8	40	11,5	4,20	1/4"	940 050
M 6	1	40	11	5,00	1/4"	940 060
M 8	1,25	40	17	6,80	1/4"	940 080
M 10	1,5	40	15	8,50	1/4"	940 100
M 12	1,75	40	15	10,20	1/4"	940 120

Materiál: HSS
Provedení: nebroušený závit
Závit: pravý

Material: HSS
Execution: non-ground thread
Thread: right-hand

Werkstoff: HSS
Ausführung: nicht geschliffenes Gewinde
Gewinde: rechts

Материал: HSS
Изогнотовлено: нешлифованная резьба
Резьба: правая

BUČOVICE TOOLS a.s.