

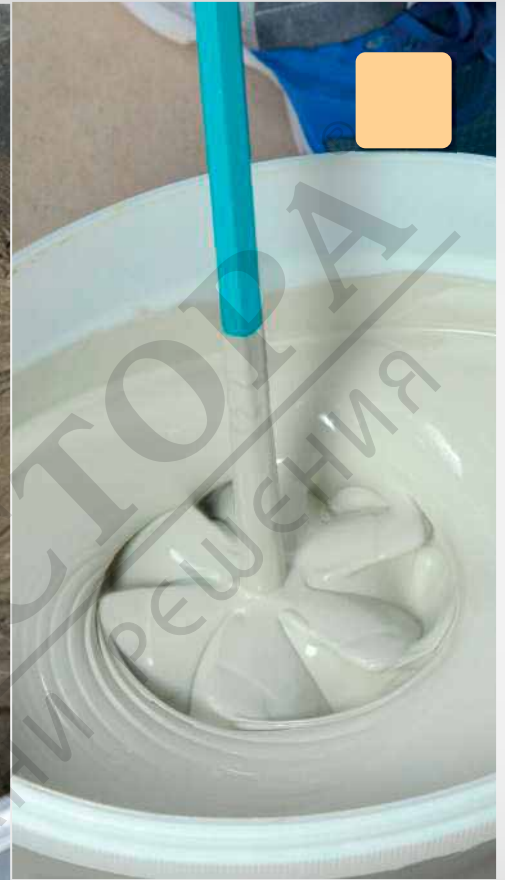

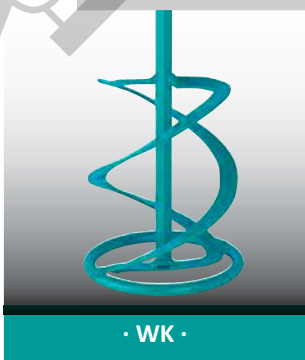
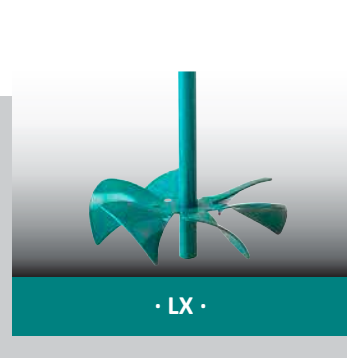


› Mixing paddles

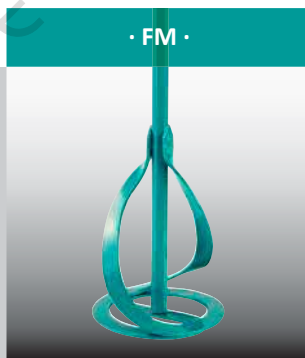

› Paddle types

MADE IN
GERMANY

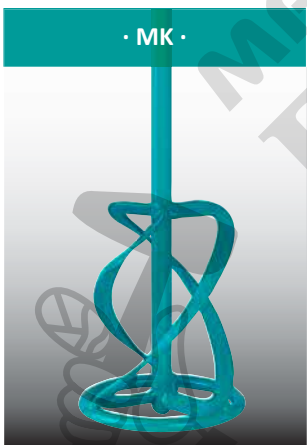

OVERVIEW PADDLES

	Item. no.	Type	Mixing volume [kg]	Ø [mm]	Length [mm]	Drill chuck size [mm]	Hand-mixer coupling	min. drive power [W]
LX The super-fast paddle, ideal for all liquids and flowing materials such as dyes, coatings, EP resins, and much more;	40030-000	LX 70 S	till 10	70	400	10		500
	40950-000	LX 90 S	10 – 15	90	500	10		500
	40960-000	LX 120 S	15 – 25	120	590	13		1.000
	40108-000	LX 120 HF	15 – 25	120	590	16	HEXAFIX®	1.000
	40970-000	LX 120 M	15 – 25	120	590		M 14	1.000
FM Paddles for professionals and do-it-yourselfers for fluid and thin materials such as dyes, paints, watery coatings; left-rotating	40880-000	FM 60 S	till 5	60	400	10		500
	40881-000	FM 80 S	5 – 10	80	400	10		500
	40882-000	FM 100 S	10 – 25	100	590	13		800
	40884-000	FM 100 M	10 – 25	100	590		M 14	800
	40883-000	FM 120 S	20 – 30	120	590	13		1.000
	40102-000	FM 120 HF	20 – 30	120	590	16	HEXAFIX®	1.000
	40886-000	FM 120 M	20 – 30	120	590		M 14	1.000
KR Paddle with high shearing forces, prevents clump formation, ideal for tile adhesive, fillers, grouts as well as self-leveling compounds sealing substances, cement, EP mixtures; easy to clean	41621-000	KR 90 S	5 – 15	90	590	10		800
	41630-000	KR 120 S	15 – 25	120	590	13		1.000
	40120-000	KR 120 HF	15 – 25	120	590	16	HEXAFIX®	1.000
	40121-000	KR 140 HF	25 – 35	140	590	16	HEXAFIX®	1.300
	40122-000	KR 160 HF	35 – 50	160	590	16	HEXAFIX®	1.600
	41631-000	KR 120 M	15 – 25	120	590		M 14	1.000
	41635-000	KR 140 M	25 – 35	140	590		M 14	1.300
	41636-000	KR 160 M	35 – 50	160	590		M 14	1.600
AR Paddle for bitumen sealants/ waterproofing AR 90 also suitable for resin mixtures in small pots	40129-000	AR 90 S	2 – 10	90	590	10		800
	40141-000	AR 170 M	25 – 40	170	590		M 14	1.300
	40140-000	AR 170 HF	25 – 40	170	590	16	HEXAFIX®	1.300
DMR Special paddle for mixing sealing and grouting compounds in cartridges	40148	DMR 40 S	5	45	500	10		800
DLX The super-fast paddle model is ideal for self-levelling compounds, equalisation fillers, bitumen-free sealings and for large volumes of liquid materials	40128-000	DLX 90 S	5 – 15	90	590	13		800
	40109-000	DLX 120 HF	15 – 30	120	590	16	HEXAFIX®	1.000
	40983-000	DLX 152 HF	30 – 50	150	590	16	HEXAFIX®	1.300
	40974-000	DLX 120 M	15 – 30	120	590		M 14	1.000
	40984-000	DLX 152 M	30 – 50	150	590		M 14	1.300

→ Mixing action
 liquid
 runny/pasty
 plastic/heavy

CONNEXION SYSTEMS FOR PADDLES



Hexagonal shaft for drills with 13 mm chuck



M-14 tread for hand mixers



Hexagonal shaft 13 mm for HEXAFIX-quick coupling system



The connection fits!


Whether for drills, hand-mixers with M-14 connection or the patented HEXAFIX® coupling - Collomix offers you the right paddle.

OVERVIEW PADDLES

		Item. no.	Type	Mixing volume [kg]	Ø [mm]	Lenght [mm]	Drill chuck size [mm]	Hand-mixer coupling	min. drive power [W]
MK Robust professional paddle with three mixing blades for powerful mixing performance; rotates easily into sand or gravel-filled mixtures; For heavy and tough materials such as concrete, screed, mortar of all kinds, plaster, EP mortar etc.	↑	41700-000	MK 100 S	10 – 15	100	590	13		700
		40114-000	MK 120 HF	15 – 25	120	590	16	HEXAFIX®	1.000
		40115-000	MK 140 HF	20 – 40	135	590	16	HEXAFIX®	1.300
		40116-000	MK 160 HF	30 – 60	160	590	16	HEXAFIX®	1.600
		41719-000	MK 120 M	15 – 25	120	590		M 14	1.000
		41749-000	MK 140 M	20 – 40	135	590		M 14	1.300
		41759-000	MK 160 M	30 – 60	160	590		M 14	1.600
WK Multi-purpose paddle with good material guidance; mixes from bottom to top, with two mixing blades for lower load on the drive machine; for pasty, creamy and plastic materials such as ready-mixed mortars, plaster, screed, grouts, synthetic resin mortar	↑	41100-000	WK 70 S	bis 7	70	400	10		400
		41200-000	WK 90 S	5 – 10	90	400	10		700
		41207-000	WK 90 / 500 S	5 – 10	90	500	10		700
		41258-000	WK 100 S	10 – 15	100	590	13		800
		41250-000	WK 120 S	15 – 25	120	590	13		1.000
		40112-000	WK 120 HF	15 – 25	120	590	16	HEXAFIX®	1.000
		40113-000	WK 140 HF	25 – 35	135	590	16	HEXAFIX®	1.300
		41269-000	WK 120 M	15 – 25	120	590		M 14	1.000
		41319-000	WK 140 M	25 – 35	135	590		M 14	1.300
MM For small quantities of tile adhesive, ready-mix and joint mortar; ideal for drilling machines	↑	41650-000	MM 85 S	5 – 10	85	400	10		500
MKN Robust professional paddle with three mixing paddles, pushes from top to bottom, for flowing and cream-like materials, ideal for gypsum plasters, dyes, soft fibre-filled materials	↓	40117-000	MKN 120 HF	15 – 25	120	590	16	HEXAFIX®	1.000
		40118-000	MKN 140 HF	20 – 40	135	590	16	HEXAFIX®	1.300
		40119-000	MKN 160 HF	30 – 60	160	590	16	HEXAFIX®	1.600
		41724-000	MKN 120 M	15 – 25	120	590		M 14	1.000
		41754-000	MKN 140 M	20 – 40	135	590		M 14	1.300
		41758-000	MKN 160 M	30 – 60	160	590		M 14	1.600
Duo paddles Mixer set for Xo and CX-duo-machines Stainless-steel version available		44060	MKD 100 HF	10 – 30	180	547		HEXAFIX®	Xo/CX
		44070	MKD 120 HF	20 – 50	190	547		HEXAFIX®	Xo/CX
		44080	MKD 140 HF	40 – 90	210	547		HEXAFIX®	Xo/CX
		44085	MKD 140 HF-N	40 – 90	210	547		HEXAFIX®	Xo/CX


Mixing action
 liquid
 runny/pasty
 plastic/heavy

MIXING ACTION OF THE PADDLES




From bottom to top

The material is conveyed from the bottom up in the bucket and flows laterally down again. Facilitates the mixing of dense and highly filled materials, such as mortar, concrete, plaster, screed, sand and gravel-filled materials. The paddle easily works its way into the material.



Parallel mixing effect


A swirling of the material occurs here with a strong suction effect in the centre. The high shear forces of the paddle counteract lump formation. Ideal for soft plastic and creamy products, such as tile cement, equalisation filler, stable fillers, adhesive and reinforcing mortar



From the top down

The material is pressed from the top down. Ideal for fluid and lightweight materials, because spraying is avoided and lump formation is also prevented. Ideal for paints, dispersions, liquid coatings, sealings or soft, gypsum-based products.

Quick guidance by the MIXAGON:

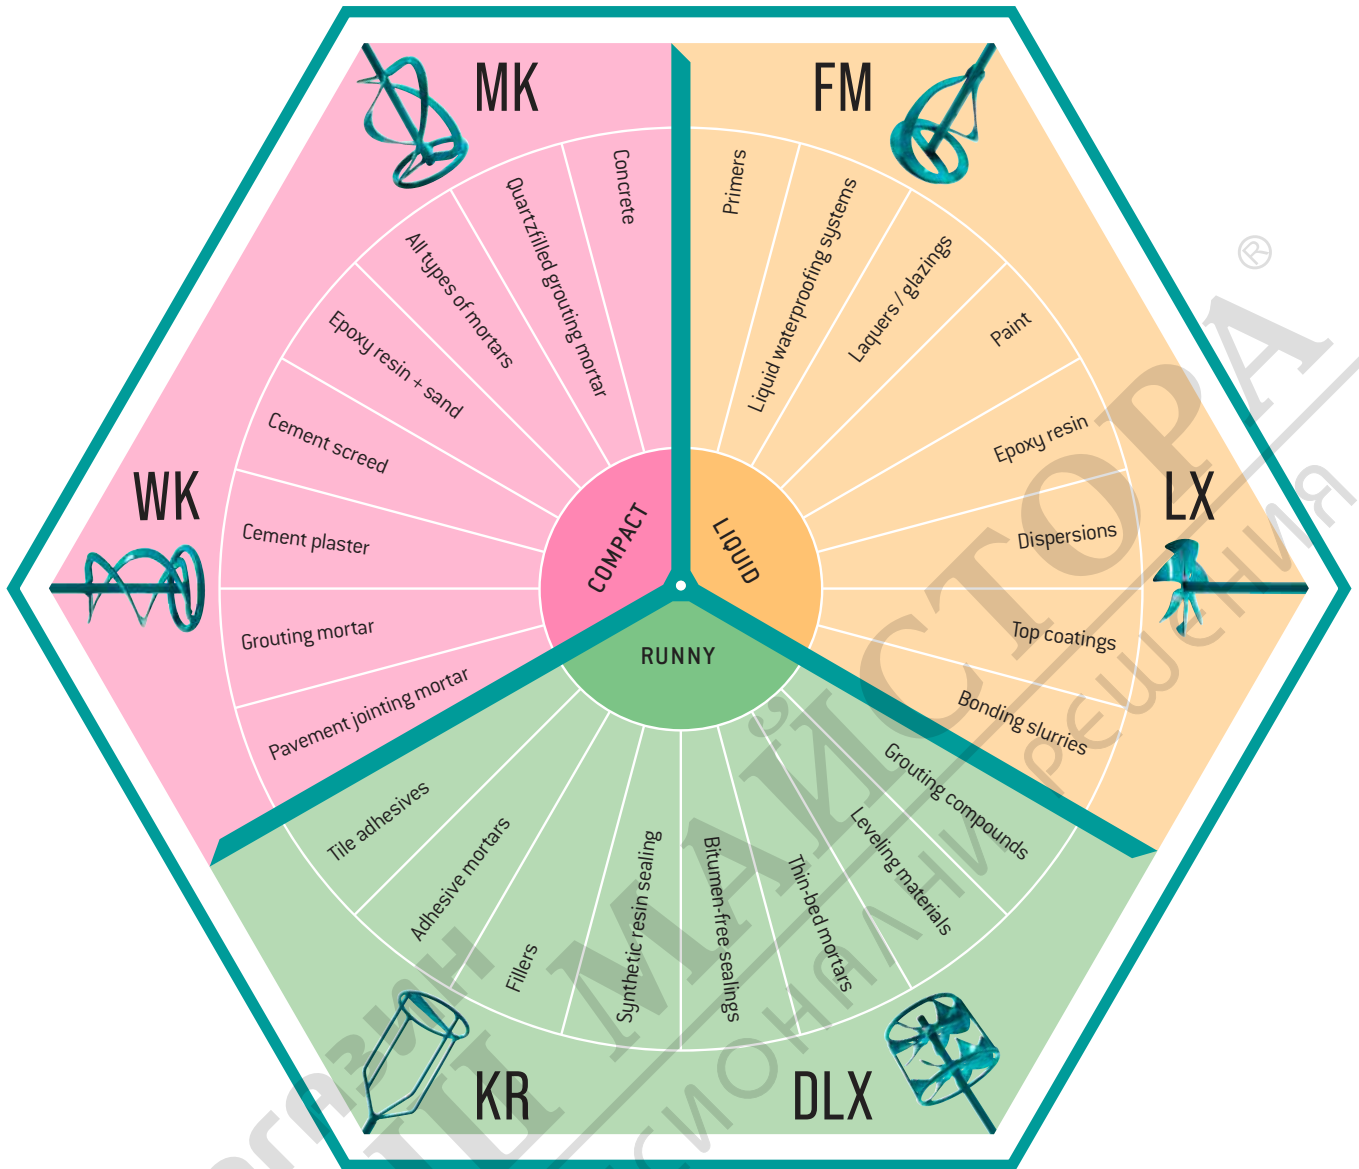

Specialists



DMR




CARTRIDGES

MKN



GYPSUM
PLASTER

MKD



FORCED ACTION
MIXING

AR



BITUMEN

MATCH YOUR MIX

Each Collomix paddle is designed for specific materials. Our Mix Atlas makes it easy to match your mix. Scan the QR code to begin.



MIX ATLAS



Collomix GmbH | Daimlerstr. 9 | 85080 Gaimersheim | Germany
Tel. +49 (0)8458 32 98 0 | info@collomix.de | www.collomix.com

