

Standard Equipment


- ✓ Honda GX 390 unleaded fuel petrol engine, 8.7 kW
- ✓ Honda GX 390 unleaded fuel petrol engine, 8.7 kW with Cyclone filter
- ✓ IC 39 petrol engine, 8 kW
- ✓ Yanmar L100N Diesel engine, 7.4 kW
- ✓ Removable water tank 30 l
- ✓ Water connection
- ✓ Adjustable handle bar with integrated vibration damping system
- ✓ Cutting depth adjustment system
- ✓ Removable blade guard for cleaning and maintenance
- ✓ **Cutting blade Ø 500 mm asphalt**

Applications

For cutting large concrete and asphalt surfaces.



Recommended blades Ø 500 mm

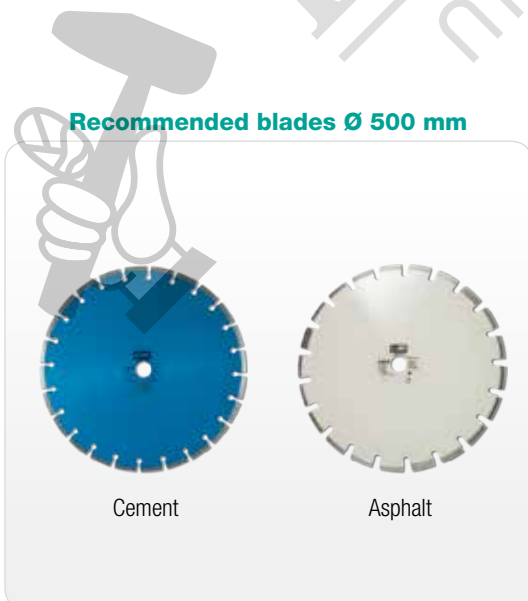

			TERRA 500
Engine Power	Honda GX390 / IC39	kW	8,7 / 8
	Yanmar L100N		7,4
Max. engine speed		rpm	3850
Starting		-	manual
Forward drive		-	manual
Blade/bore diameter		mm	500/25,4
Max. cutting depth		mm	190
Max. blade speed		rpm	2900
Max. blade peripheral speed		m/sec	75
Lp in operator's position		dB(A)	91
Machine weight	Honda GX390 / IC39	kg	130
	Yanmar L100N		148
Packed machine weight	Honda GX390 / IC39	kg	140
	Yanmar L100N		158
Dimensions with mounted blade and lifted rod w/l/h		mm	610x1376x1235
Packing dimensions w/l/h		mm	670x1205x1224