


Гайка ситна резба **DIN 934**

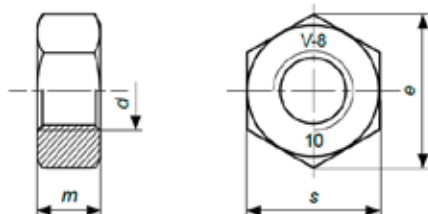

| | | |
|-----------------------|--------------|-------------|
| ISO | UNI | DIN |
| (8673)* | 5588 | 934 |
| MATERIALE | ACCIAIO | |
| MATERIAL | STEEL | |
| PROPRIETÀ MECCANICHE | SECONDO | DIN 267 |
| MECHANICAL PROPERTIES | ACCORDING TO | UNI 3740-4 |
| CLASSE | 10/8G | |
| CLASS | | |
| TOLLERANZE | SECONDO | ISO 4759-1 |
| TOLLERANCES | ACCORDING TO | CAT A - B** |

| d | s | m | e min | passo - pitch | Kg |
|-----------|----------|----------|--------------|----------------------|-----------|
| M 8x1 | 13 | 6,5 | 14,38 | 1 | 5,3 |
| M 10x1 | 17 | 8 | 18,90 | 1 | 11,4 |
| M 10x1,25 | 17 | 8 | 18,90 | 1,25 | 11,4 |
| M 12x1,25 | 19 | 10 | 21,10 | 1,25 | 17,0 |
| M 12x1,5 | 19 | 10 | 21,10 | 1,5 | 17,0 |
| M 14x1,5 | 22 | 11 | 24,49 | 1,5 | 24,5 |
| M 16x1,5 | 24 | 13 | 26,75 | 1,5 | 32,6 |
| M 18x1,5 | 27 | 15 | 29,56 | 1,5 | 47,2 |
| M 20x1,5 | 30 | 16 | 32,95 | 1,5 | 62,3 |
| M 22x1,5 | 32 | 18 | 35,03 | 1,5 | 79 |
| M 24x2 | 36 | 19 | 39,55 | 2 | 106 |
| M 27x2 | 41 | 22 | 45,20 | 2 | 161 |
| M 30x2 | 46 | 24 | 50,85 | 2 | 221 |
| M 33x2 | 50 | 26 | 55,37 | 2 | 279 |
| M 36x3 | 55 | 29 | 60,79 | 3 | 387 |
| M 39x3 | 60 | 31 | 66,44 | 3 | 492 |
| M 42x3 | 65 | 34 | 72,09 | 3 | 660 |
| M 45x3 | 70 | 36 | 76,95 | 3 | 810 |
| M 48x3 | 75 | 38 | 82,60 | 3 | 980 |
| M 52x3 | 80 | 42 | 88,25 | 3 | 1230 |
| M 56x4 | 85 | 45 | 93,56 | 4 | 1430 |
| M 60x4 | 90 | 48 | 99,21 | 4 | 1700 |

Kg PESO PER 1000 PEZZI / WEIGHT FOR 1000 PCS

